



双恒阀门集团有限公司

SHUANGHENG VALVE GROUP CO., LTD.

双恒阀门集团有限公司 SHUANGHENG VALVE GROUP CO., LTD.

地址: 上海市金山工业区金百路398号 邮编: 201506
销售热线: 021-67225888 67229555 37219999
传真: 021-67276959 67276958
服务热线: 021-37215777

E-mail: zgshfm@163.com
http:// www.zgshfm.com



© 双恒阀门集团有限公司
(SHUANGHENG VALVE GROUP CO., LTD.)版权所有

◎ 若有改动, 恕不通知。请用户使用最新版本,
本公司拥有最终解释权。

♻️ 采用生态纸印刷
● 版本: 2018版

Advanced Science And Technology
Is The Strong Guarantee The SHOV Set Up The Firm Market.
先进的科学技术是双恒阀门建立稳固市场的有力保证!

产品总汇 PRODUCT SUMMARY



上海制造



Brief Introduction

企业简介

双恒阀门集团有限公司（以下简称“双恒”），是高温高压、超低温等严苛工况阀门的专业研发制造商。总部位于上海市金山工业区。公司从事阀门行业20余年，注册资金10018万元，拥有五家子公司。经过多年的拼搏发展，现已发展成为中国阀门行业的重点骨干企业，专注于提高苛刻工业环境下专用阀门的制造能力与创新能力，致力于为客户提供一整套流体控制解决方案，是一家集科研开发、试验检测、制造销售为一体的大型阀门企业。

公司产品主要为6大类，1000多个规格品种。在常规阀类的基础上，公司研发专利产品包括高压临氢阀、超低温特种阀、高温高压核电阀、高温高压氧气阀、天然气调节阀、熔盐转运阀、熔盐输送节流阀、清管器发射接收阀、船用低温阀、防结焦球阀、双向硬碰硬球阀、低温撑开式球阀、紧急切断阀等几十种高端特种阀门专利产品。生产的特种阀门广泛应用于及其严苛的工矿环境，其中应用环境高温可达1000℃，高压4500LB，超低温-196℃，高颗粒(如矿山工业，煤化工工业、化工的化剂、SES及PTO工艺等颗粒输送场合)。主要材质：碳钢、锻钢、不锈钢、铬钼钢、低温钢、双相钢、哈氏C、蒙乃尔等。产品广泛覆盖石油化工、煤化工、核电、LNG、航天、冶金、造纸等行业。

公司拥有完善的企业标准化管理体系，采用世界顶尖的精密铸造技术以及现代化电子检测系统，运用先进的SAP资源管理、条形仓储管理系统和ERP系统对工厂进行管理。产品从选料到成品出厂，全程运用国际先进的管理模式进行生产。实现了专业化、自动化、规范化生产。公司坚持以科技创新为企业发展先导，设立了CAD阀门设计中心，三维模拟制造设计系统，阀门检测中心和特种阀门试验平台，并与华东理工大学、中科院等单位进行长期研发合作，不断优化产品结构和性能，保证高端特种阀门研发生产的质量和速度。

公司荣获上海名牌，上海市高新技术企业，上海市专精特新企业，小巨人企业，企业技术中心认定，同时获得特种设备制造生产许可证“TS A1认证”，欧盟CE认证，俄罗斯EAC认证，ISO9001国际质量体系认证，ISO14001环境体系认证，OHSAS18001职业管理体系认证，ISO10012测量管理体系认证，AAA信用企业证书、重合同守信用企业等30多个证书。同时为中石油、中石化、中海油、中国化工、中核集团、大唐、国电、华能、中电投、宝武集团、中煤、神华、伊泰、赛鼎工程等集团的合格入围供应商。集团积极参与国家倡导的一带一路经济建设，产品远销欧洲、北美、中东、东南亚、非洲等十几个国家和地区。优质的产品、快捷的售后服务赢得广大海内外客户的赞誉和信赖。公司坚持“和谐、谦学、求真、务实、创新”的企业精神，以市场为中心的经营理念，不断为广大客户提供最为完善的服务。

双恒诚邀广大用户携手合作，互利双赢，共创辉煌！

双赢合作，品牌永恒！



企业文化 culture system

公司名称：双恒阀门集团有限公司
企业简称：双恒阀门集团
公司商标：SHOV
企业口号：双赢合作，品牌永恒
人才理念：用心才能创新，竞争才能发展，用一流的待遇留住一流的人才
公司目标：建立现代化科技企业，努力打造世界阀门知名品牌

企业精神：和谐、谦学、求真、务实、创新
企业宗旨：与时俱进、不断探索、勇于创新、产业报国
公司理念：为顾客创造价值，为员工谋求发展，为社会承担责任
质量方针：质量—恒古不变制胜之道，一流的质量来源于一流的管理
服务方针：[高、真、无、优]即工作高效、服务真诚、无私奉献、优质服务

Shuangheng Valve Group Co., Ltd. (hereinafter referred to as "Shuangheng") is a professional R&D manufacturer of high-temperature, high-pressure, ultra-low temperature and other harsh conditions. Headquartered in Shanghai Jinshan Industrial Zone. We have been engaged in the valve industry for more than 20 years with a registered capital of RMB 100.18 million and has five subsidiaries. After years of hard work and development, it has now become a key enterprise in China's valve industry, focusing on improving the manufacturing capabilities and innovation capabilities of special valves under harsh industrial environments and is committed to providing customers with a complete set of fluid control solutions, is a large-scale valve company with a collection of scientific research. Development, testing, manufacturing and sales.

The company's products include mainly six categories and more than 1,000 specifications. On the basis of conventional valves, company designed dozens of high-end special valve patented products include high pressure hydrogen valve, ultra-low temperature special valve, high temperature and high pressure nuclear power valve, high temperature and high pressure oxygen valve, natural gas control valve, molten salt transfer valve, molten salt delivery throttle valve, pigging Launcher receiver valve, marine cryogenic valve, anti-coking ball valve, two-way hard-fault hard ball valve, low-temperature open spherical valve, emergency shut-off valve. The special valves produced are widely used in the harsh industrial and mining environment, where the application environment can reach up to 1000° C high temperature, 4500LB high pressure, -196° C ultra-low temperature, high granules (such as mining industry, coal chemical industry, chemicals, etc. SES and PTO processes etc.). The main materials are: carbon steel, forged steel, stainless steel, chromium molybdenum steel, low temperature steel, dual phase steel, Hastelloy C, Monel etc. Our products cover a wide range of industries including petrochemicals, coal chemicals, nuclear power, LNG, aerospace, metallurgy, and paper-making.

The company has a perfect enterprise standard management system, adopting the world's top precision casting technology and modern electronic detection systems, using advanced SAP resource management, strip storage management system and ERP system to manage factory. Products from the choosing of materials to finished products, the entire process used international advanced management mode. Realized professional, automated and standardized production. The company insists on scientific and technological innovation as the forerunner of enterprise development, set up CAD valve design center, three-dimensional simulation manufacturing design system, valve inspection center and special valve testing platform, cooperated with East China University of Science and Technology (ECUST) and Chinese Academy of Sciences for long-term R&D, which continuously optimized the product structure and performance, guaranteed the quality and speed of high-end special valve R & D production.

The company have the honour to win the Shanghai Famous Brand, Shanghai High-tech Enterprise, Shanghai Specialized New Enterprise, Little Giant Enterprise and Enterprise Technology Center, meanwhile obtained the special equipment manufacturing and production license "TS A1", the European Union CE Certification, Russia EAC certification, ISO9001 international quality system certification, ISO14001 environmental system certification, OHSAS18001 occupation management system certification, ISO10012 measurement management system certification, AAA credit enterprise certificate, contract trustworthy company etc. At the same time, the company becomes qualified network supplier for PetroChina, Sinopec, CNOOC, China National Chemical Industry, CNNC, Datang, Guodian, Huadian, Huaneng, China Power Investment, Baowu Group, China Coal, Shenhua, Yitai, and Sailing Engineering. The group actively participates in the Economic Development of One Belt and One Road [advocated by the state, products exported to over a dozen countries and regions such as Europe, North America, the Middle East, Southeast Asia and Africa. High-quality products and efficient after-sales service have won praise and trust from customers at home and abroad. The companies adhere to the "harmonious, modest, truth-seeking, pragmatic and innovative" spirit of enterprise, market-centric business philosophy to constantly provide our clients with perfect services.

Shuangheng sincerely invite all users to work together for mutual benefit and win-win cooperation!

Win-Win cooperation, Eternal Brand!



企业资质  Equipment center



A part of workshop

车间一角  Equipment center

双恒阀门集团拥有23000平方加工场地，布置着行业最领先的加工设备，有材料检测、理化分析、锻压流水线、热处理、过程检验、压力试验、高精度研磨、大型立车加工中心、数控机床、钻床、镗床、全自动焊接机，超低温试验设备等，保证产品的每个零部件的精度一致性，确保产品达到最佳性能与最可靠的品质。

集团在完成用于常规零部件的生产制造，采用氮化处理、化学镀铬、堆焊合金、喷涂硬质合金等表面硬化处理技术，完成特种工序的零件加工，满足苛刻工况下对阀门的使用要求。集团每一位操作工程师、技术人员都经过严格的培训，掌握着最新的技能及具有对产品的最高的工作责任心。



荣誉证书 | Honorary certificate



Enterprise Technology Center

研发中心 | Testing equipment 企业技术中心




Quality Inspection center

检测设备 | Testing equipment 质量检验中心

集团严格按照ISO9001国际质量体系认证标准，每个产品的生产及质量品质控制都进行每个环节的审核，品质过程管理的每一个细节，都注入双恒人的高度的责任心与极大的耐心。

集团拥有最先进的检测设备，有光谱仪、金相切割机、金相镶嵌机、金相磨机、倒置金相显微镜、冲击试样缺口投影仪、拉伸试验、冲击试验、硬度检测、氮质谱仪、超声波检测、磁粉探伤检测等；公司的每台产品都经过全面的测试，确保产品100%合格。

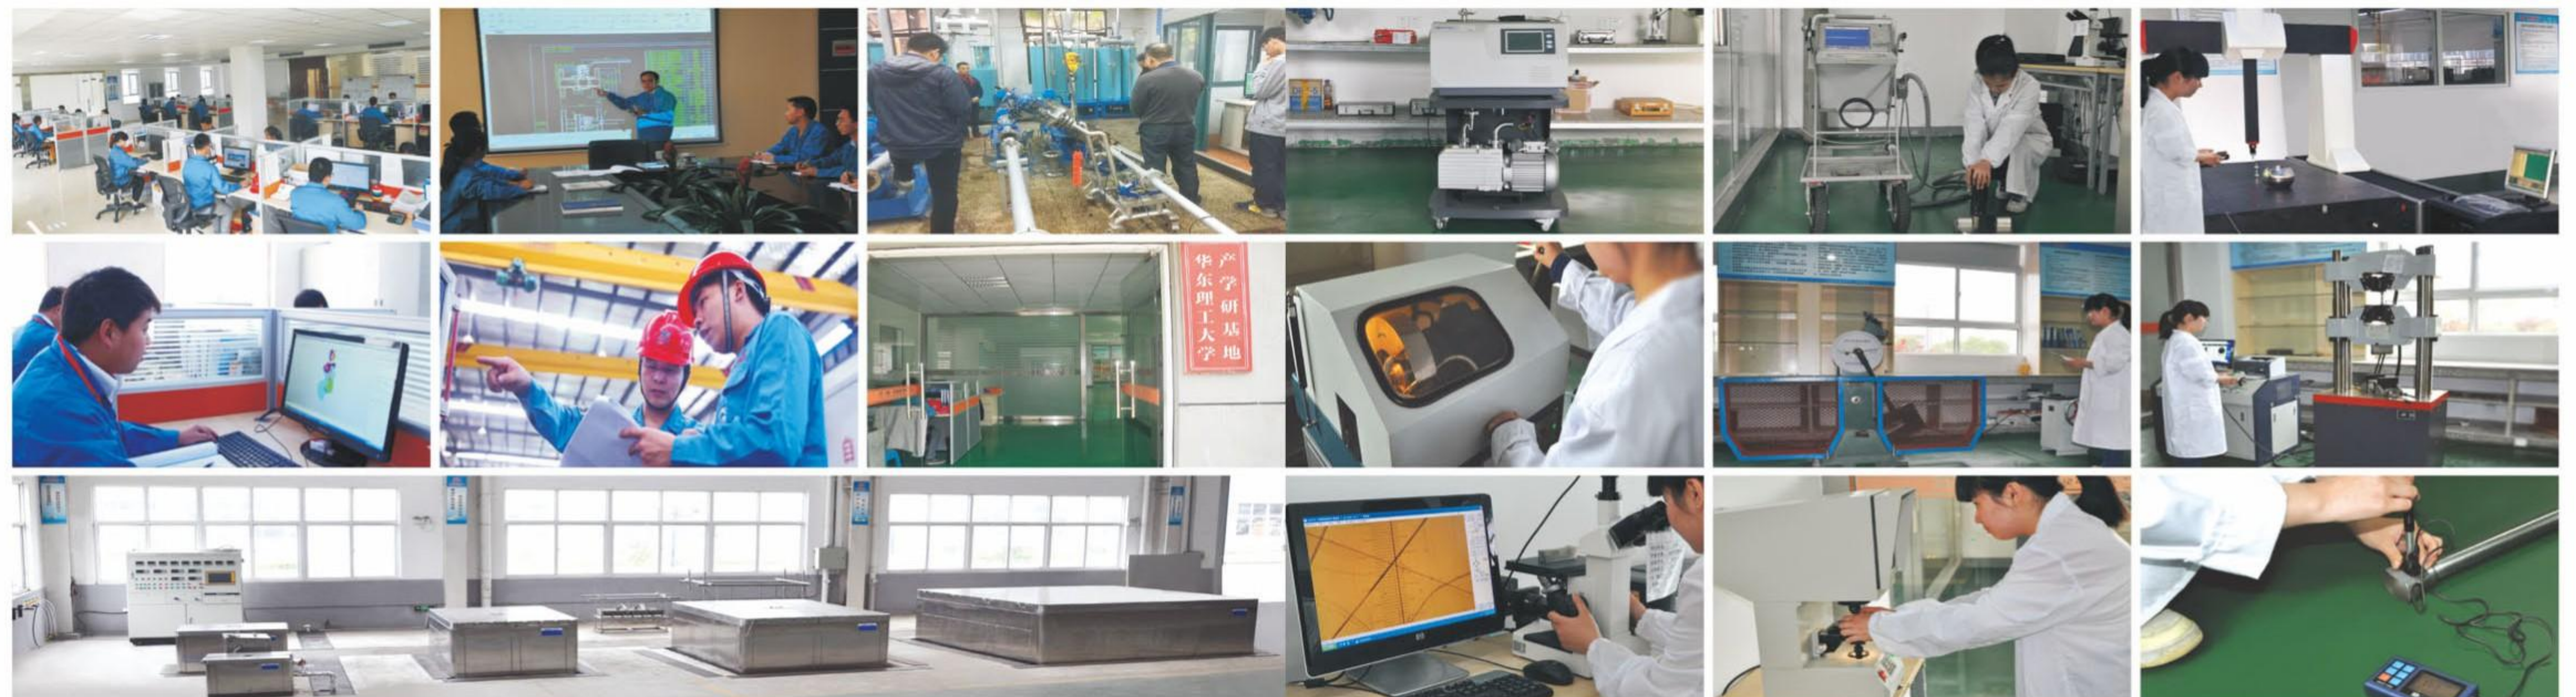

目录

Catalog

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



05	油田阀系列	OIL VALVE SERIES
06	刀闸阀系列	Kinfe gete VALVE SERIES
08	截止阀系列	GLONBE VALVE SERIES
12	球阀系列	BALL VALVE SERIES
20	锻钢阀系列	FORGED STEE VALVE SERIES
21	止回系列	CHECH VALVE SERIES
23	蝶阀系列	BUTTERFIY VALVE SERIES
26	安全阀系列	RELIEF VALVE SERIES
28	冶金阀系列	Metallurgical VALVE SERIES
35	放料阀系列	FEEDING VALVE SERIES
36	调节阀系列	REGULATOR VALVE SERIES
39	衬氟阀门系列	FLUORING-BUTTERFLY VALVES SERIES
42	丝扣阀门系列	THREAD IS VALVE SERIES
44	黄铜阀门系列	BRASS VALVE SERIES
46	旋塞阀系列	PLUG VALVE SERIES
47	旋塞阀、真空阀系列	PLUG VALVE, VACUUM VALVE SERIES
51	给排水阀门系列	WATER SUPPLY AND DISCHARGE VALVE SERIES
52	针型阀系列	NEEDLE VALVE SERIES
54	疏水阀系列	STEAM TRAP VALVE SERIES
57	减压阀系列	PRESSURE REDUCING VALVE SERIES
58	过滤阀系列	FITER VALVE SERIES
59	电磁阀系列	SOLENOID VALVE SERIES
60	波纹管系列	BELLOWS VALVE SERIES
61	氧气阀系列	OXYGEN VALVE SERIES
62	呼吸阀、阻火器系列	THE RESPIRATION VALVE, THE FLAME ARRESTER SERIES
63	阻火器、视镜系列	THE FIRE RESISTANCE, AS A MIRROR SERIES
65	卫生级阀门系列	SANITATION VALVE SERIES

闸阀系列

GATE VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



防喷分流闸阀 BLOWOUT PREVENTION DIVERTER GATE VALVE

产品型号Product Model: Z41H
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
煤矿
Coal mine



法兰闸阀 FLANGE GATE VALVE

产品型号Product Model: Z41H
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽、酸性介质等
Water,oil,steam,acid medium etc



法兰闸阀 FLANGE GATE VALVE

产品型号Product Model: Z41H
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽、酸性介质等
Water,oil,steam,acid medium etc



法兰闸阀 FLANGE GATE VALVE

产品型号Product Model: Z41H
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽、酸性介质等
Water,oil,steam,acid medium etc



不锈钢低温闸阀 LOW TEMPERATURE STAINLESS STEEL GATE VALVES

产品型号Product Model: DZ41Y
公称通径Nominal Diameter: 15~1200mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -196°C~300°C
适用介质Suitable Medium:
天然气、液氨
Natural gas, liquid ammonia



吹2高温闸阀 LARGE DIAMETER GATE VALVES

产品型号Product Model: ZZ40H/Y
公称通径Nominal Diameter: 50~400mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~550°C
适用介质Suitable Medium:
烟气、粉末状、颗粒状
Flue gas, powder, granule



美标法兰闸阀 AMERICAN STANDARD FLANGE GATE VALVES

产品型号Product Model: Z40H
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 150~900LB
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
液体、气体
Liquid, gas



苏式闸阀 SUSHI GATE VALVES

产品型号Product Model: Z41W
公称通径Nominal Diameter: 10~1000mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、石油、天然气等等
Water,oil,steam,acid medium etc



法兰闸阀 FLANGE GATE VALVE

产品型号Product Model: Z41H
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽、酸性介质等
Water,oil,steam,acid medium etc



法兰闸阀 FLANGE GATE VALVE

产品型号Product Model: Z41H
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽、酸性介质等
Water,oil,steam,acid medium etc



真空隔离闸阀 FLANGE GATE VALVE

产品型号Product Model: Z41H
公称通径Nominal Diameter: 15~1200mm
公称压力Nominal Pressure: 1.0~10.0MPa
适用温度Suitable temperature: -29°C~550°C
适用介质Suitable Medium:
水、油品、蒸汽
Water,steam,etc



铬钼钢闸阀 CHROMIUM MUGANG GATE VALVES

产品型号Product Model: Z41Y-46I
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: -29°C~540°C
适用介质Suitable Medium:
水、油品、蒸汽等
Water,oil, steam



法兰闸阀 FLANGE GATE VALVE

产品型号Product Model: Z41H
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽、酸性介质等
Water,oil,steam,acid medium etc



法兰闸阀 FLANGE GATE VALVE

产品型号Product Model: Z41H
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽、酸性介质等
Water,oil,steam,acid medium etc



波纹管闸阀 BELLOWS GATE VALVES

产品型号Product Model: Z41H
公称通径Nominal Diameter: 15~450mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、蒸汽
Water,steam,etc



保温闸阀 INSULATION GATE VALVES

产品型号Product Model: BZ41W, BZ41Y
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
酸类、碱类
Acid,alkal class

闸阀系列

GATE VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

闸阀系列

GATE VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



焊接电动闸阀 WELDING ELECTRIC GATE VALVES

产品型号Product Model: Z961Y
公称口径Nominal Diameter: 50~600mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、蒸气、油
Water, steam, oil



高温高压焊接闸阀 HIGH TEMPERATURE HIGH PRESSURE WELDING GATE VALVES

产品型号Product Model: Z60Y、Z61Y
公称口径Nominal Diameter: 50~225mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、蒸气、油
Water, steam, oil



中压平板闸阀 MEDIUM VOLTAGE FLAT GATE VALVE

产品型号Product Model: Z43WF
公称口径Nominal Diameter: 50~800mm
公称压力Nominal Pressure: 1.0~16.0MPa
适用温度Suitable temperature: -29°C~220°C
适用介质Suitable Medium:
水、石油、天然气、蒸气
Water, oil, natural gas, steam



电动平板闸阀 ELECTRIC FLAT VALVE

产品型号Product Model: Z943WF
公称口径Nominal Diameter: 100~1000mm
公称压力Nominal Pressure: 1.0~16.0MPa
适用温度Suitable temperature: -29°C~220°C
适用介质Suitable Medium:
石油、天然气
oil, natural gas



正伞齿轮焊接闸阀 LS BEVEL GEAR WELDING GATE VALVES

产品型号Product Model: Z460Y
公称口径Nominal Diameter: 50~600mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、蒸气、油
Water, steam, oil



暗杆闸阀 DARK BAR GATE VALVES

产品型号Product Model: Z45H
公称口径Nominal Diameter: 50~1000mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
水、蒸气、油
Water, steam, oil



气动平板闸阀 PNEUMATIC FLAT VALVE

产品型号Product Model: Z643WF
公称口径Nominal Diameter: 50~800mm
公称压力Nominal Pressure: 1.6~2.5MPa
适用温度Suitable temperature: -29°C~200°C
适用介质Suitable Medium:
水、油品、天然气
Water, oil, natural gas



导流孔平行式闸阀 DIVERSION HOLE PARALLEL TYPE GATE VALVES

产品型号Product Model: Z43F
公称口径Nominal Diameter: 50~800mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -29°C~220°C
适用介质Suitable Medium:
水、石油、天然气
Water, oil, natural gas



水封闸阀 WATER SEAL GATE VALVES

产品型号Product Model: DSZ64H/Y
公称口径Nominal Diameter: 50~800mm
公称压力Nominal Pressure: 1.0~10.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、蒸汽、非腐、蚀性气体
water, steam, oil products, not corruption Gas corrosion



陶瓷闸阀 CERAMIC GATE VALVES

产品型号Product Model: P Z41TC
公称口径Nominal Diameter: 50~600mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~500°C
适用介质Suitable Medium:
灰渣水混合物
Ash mixture water



燃气平板闸阀 GAS FLATE GATE VALVE

产品型号Product Model: Z47F
公称口径Nominal Diameter: 25~1000mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~220°C
适用介质Suitable Medium:
石油、天然气
oil, natural gas



燃气闸阀 GAS GATE VALVES

产品型号Product Model: (K)Z4(6)7F(H)
公称口径Nominal Diameter: 25~1000mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~220°C
适用介质Suitable Medium:
油、天然气、水等非腐蚀性介质
Oil, natural gas, water and the corrosion
Sex medium



快速排污阀 FAST DRAIN VALVE

产品型号Product Model: P48H、Z44H
公称口径Nominal Diameter: 25~80mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: ≤450°C
适用介质Suitable Medium:
水、泥、烟尘
Water, mud and dust



楔式暗杆闸阀 WEDGE TYPE DARK BAR GATE VALVES

产品型号Product Model: Z45W
公称口径Nominal Diameter: 50~1000mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: ≤120°C
适用介质Suitable Medium:
水、蒸气、油
Water, steam, oil



高压燃气平板闸阀 HIGH PRESSURE GAS FLAT VALVE

产品型号Product Model: Z547F
公称口径Nominal Diameter: 25~1000mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~220°C
适用介质Suitable Medium:
石油、天然气
oil, natural gas



防盗闸阀 SECURITY GATE VALVES

产品型号Product Model: FDZ45H
公称口径Nominal Diameter: 40~300mm
公称压力Nominal Pressure: 1.6~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、蒸汽
Water, oil, steam

油田阀系列

OIL VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

刀闸阀系列

KINFE GETE VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



平行式闸阀 PARALTEL TYPE GATE VALVES

产品型号Product Model: Z63Y
公称通径Nominal Diameter: 25~150mm
公称压力Nominal Pressure: 16.0~40.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、天然气
Water,oil and,natural gas



平行式闸阀 PARALLEL TYPE GATE VALVES

产品型号Product Model: Z83Y
公称通径Nominal Diameter: 25~150mm
公称压力Nominal Pressure: 16.0~60.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、天然气、泥浆
Water,oil,natural gas, mud



手动刀型闸阀 MANUAL TYPE KNIFE GATE VALVES

产品型号Product Model: PFZ73
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~120°C
适用介质Suitable Medium:
纸浆、污水、煤浆、泥浆
Pulp, sewage, coal slurry, mud



手动浆液阀 MANUAL SLURRY VALVES

产品型号Product Model: Z73X
公称通径Nominal Diameter: 50~1000mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~120°C
适用介质Suitable Medium:
纸浆、污水、煤浆、泥浆
Pulp, sewage, coal slurry, mud



平行式闸阀 PARALLEL TYPE GATE VALVES

产品型号Product Model: Z43Y
公称通径Nominal Diameter: 25~200mm
公称压力Nominal Pressure: 16.0~40.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、天然气、泥浆
Water,oil,natural gas, mud



平衡式节流截止阀 BALANCED THROTTLING GLOBE VALVE

产品型号Product Model: J46Y
公称通径Nominal Diameter: 25~200mm
公称压力Nominal Pressure: 16.0~35.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、天然气
Water,oil and,natural gas



手动单夹式刀型闸阀 MANUAL SINGLE CLIP TYPE KNIFE GATE VALVES

产品型号Product Model: PZ43H
公称通径Nominal Diameter: 50~1400mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~120°C
适用介质Suitable Medium:
纸浆、污水、煤浆
Pulp, sewage, coal slurry



手动螺旋闸阀 MANUAL SPIRAT GATE VALVES

产品型号Product Model: QDZM-X
公称通径Nominal Diameter: 200X200-700X700mm
阀体材质Nominal Pressure: 铸钢、不锈钢
适用温度Suitable temperature: -29°C~120°C
适用介质Suitable Medium:
污水、给排水
Sewage, water supply and drainage



卡箍式节流截止阀 WATER SEAL GATE VALVES

产品型号Product Model: L86Y、J8B6YH/Y
公称通径Nominal Diameter: 25~150mm
公称压力Nominal Pressure: 16.0~35.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、天然气
Water,oil and,natural gas



平衡式多用途截止阀 BALANCED USE OF MANY GLOBE VALVE

产品型号Product Model: J86Y
公称通径Nominal Diameter: 25~150mm
公称压力Nominal Pressure: 16.0~35.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、天然气
Water,oil and,natural gas



链轮传动刀型闸阀 Chain transmission knife gate valve type

产品型号Product Model: Z41H
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~120°C
适用介质Suitable Medium:
纸浆、污水、煤浆、泥浆
Pulp, sewage, coal slurry, mud



液动刀型闸阀 FLUID MOVING KNIFE GATE VALVE TYPE

产品型号Product Model: PZ773
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~120°C
适用介质Suitable Medium:
纸浆、污水、煤浆、泥浆
Pulp, sewage, coal slurry, mud



高压调节角式截止阀 HIGH VOLTAGE REGULATION ANGLE TYPE GLOBE VALVE

产品型号Product Model: LJ67Y
公称通径Nominal Diameter: 25~150mm
公称压力Nominal Pressure: 16.0~45.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品
Water,oil



卡箍止回阀、高压止回阀 CARD CHECK VALVE HOOP, HIGH PRESSURE CHECK VALVE

产品型号Product Model: H82H、HG81A
公称通径Nominal Diameter: 25~200mm
公称压力Nominal Pressure: 16.0~40.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品
Water,oil



伞齿轮传动刀型闸阀 BEVEL GEAR TRANSMISSION TYPE KNIFE GATE VALVES

产品型号Product Model: PZ575
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~120°C
适用介质Suitable Medium:
纸浆、污水、煤浆、泥浆
Pulp, sewage, coal slurry, mud



电动浆液阀 ELECTRIC SLURRY VALVES

产品型号Product Model: Z973X
公称通径Nominal Diameter: 50~1200mm
公称压力Nominal Pressure: 0.6~1.0MPa
适用温度Suitable temperature: -29°C~120°C
适用介质Suitable Medium:
泥浆、煤渣、纸浆、粮浆、粒状物
The mud, cinders,pulp grain pulp, Granular things

刀闸阀系列

KINFE GETE VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

截止阀系列

GLONBE VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



电动刀型闸阀 ELECTRIC KNIFE GATE VALVE TYPE

产品型号Product Model: PZ973
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~120°C
适用介质Suitable Medium:
纸浆、污水、煤浆、泥浆
Pulp, sewage, coal slurry, mud



电液动刀型闸阀 ELECTRIC HYDRAULIC TYPE KNIFE GATE VALVES

产品型号Product Model: PZ243
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~120°C
适用介质Suitable Medium:
纸浆、污水、煤浆、泥浆
Pulp, sewage, coal slurry, mud



国标法兰截止阀 GB FLANGE GLOBE VALVE

产品型号Product Model: J41H
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸气等
Water, oil, steam etc



锻钢截止阀 FORGING STEEL GLOBE VALVE

产品型号Product Model: J41H/Y
公称通径Nominal Diameter: 10~100mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸气、酸性介质等
Water, oil, steam, acid medium etc



气动刀型闸阀 PNEUMATIC TYPE KNIFE GATE VALVES

产品型号Product Model: PZ673
公称通径Nominal Diameter: 50~1400mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~120°C
适用介质Suitable Medium:
污水、煤浆、灰、渣水混合物
Sewage, coal slurry, ash and slag water blending things



气动刀型闸阀 PNEUMATIC TYPE KNIFE GATE VALVES

产品型号Product Model: PZ643
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~120°C
适用介质Suitable Medium:
纸浆、污水、煤浆、泥浆
Pulp, sewage, coal slurry, mud



不锈钢法兰截止阀 STAINLESS STEEL FLANGE GLOBE VALVE

产品型号Product Model: J41W/Y
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 1.6~10.0MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
液体、气体
Liquid, gas



角式截止阀 HORNY PATTERN GLOBE VALVES

产品型号Product Model: J44W
公称通径Nominal Diameter: 10~100mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、油品、蒸气、酸性介质等
Water, oil, steam, acid medium etc



陶瓷出料阀 CERAMIC DISCHARGE VALVE

产品型号Product Model: Z674TC
公称通径Nominal Diameter: 50~350mm
公称压力Nominal Pressure: 0.6~1.6MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
干灰、粉煤及固体颗粒
Dry ash, and adding solid particles



气动陶瓷双闸板阀 PNEUMATIC CERAMIC DOUBLE GATE VALVES

产品型号Product Model: Z644TC
公称通径Nominal Diameter: 40~300mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
干灰、粉煤及固体颗粒
Dry ash, and adding solid particles



不锈钢伞齿轮截止阀 STAINLESS STEEL BEVEL GEAR GLOBE VALVE

产品型号Product Model: J541W
公称通径Nominal Diameter: 50~800mm
公称压力Nominal Pressure: 1.6~16MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
硝酸类
Nitric acid kind of



截止阀 GLOBE VALVES

产品型号Product Model: Z41H
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、油品、蒸气、酸性介质等
Water, oil, steam, acid medium etc



气动浆液阀 PNEUMATIC SLURRY VALVES

产品型号Product Model: Z673X
公称通径Nominal Diameter: 50~1000mm
公称压力Nominal Pressure: 16.0~2.5MPa
适用温度Suitable temperature: 80°C
适用介质Suitable Medium:
水
Water



气动陶瓷单闸板阀 CARD CHECK VALVE HOOP, AND HIGH PRESSURE CHECK VALVE

产品型号Product Model: Z643TC
公称通径Nominal Diameter: 50~300mm
公称压力Nominal Pressure: 0.6~1.6MPa
适用温度Suitable temperature: -200°C
适用介质Suitable Medium:
煤粉、煤粉灰、水泥
FenHui pulverized coal, coal, cement



API美标不锈钢截止阀 API AMERICAN STANDARD STAINLESS STEEL GLOBE VALVE

产品型号Product Model: J41W
公称通径Nominal Diameter: 11/2"-16"
公称压力Nominal Pressure: 150-600MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、油品、蒸气等
Water, oil, steam etc



手动焊接截止阀 MANUAL WELDING GLOBE VALVE

产品型号Product Model: J61W
公称通径Nominal Diameter: 10~100mm
公称压力Nominal Pressure: 20~32MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸气等
Water, oil, steam etc

截止阀系列

GLONBE VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

截止阀系列

GLONBE VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



焊接式水封截止阀
WELDING TYPE WATER SEAL GLOBE VALVE

产品型号Product Model: DS/J61H
公称通径Nominal Diameter: 10~100mm
公称压力Nominal Pressure: 150~3500Lb
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸汽、非腐蚀性气体
Water, steam, the corrosive gas etc



电动Y型截止阀
ELECTRIC Y GLOBE VALVE

产品型号Product Model: J965Y
公称通径Nominal Diameter: 10~100mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、蒸汽等
Water, steam, etc



节流截止放空阀
THE VENT VALVE THROTTLING

产品型号Product Model: FJ41Y
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~16MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
石油、天然气
Oil, natural gas



手动美标截止阀
MANUAL BEAUTIFUL MARK GLOBE VALVE

产品型号Product Model: J41W
公称通径Nominal Diameter: 1/2"~8
公称压力Nominal Pressure: 150~300Lb
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽
Water, oil products, steam



截止阀
GLOBE VALVES

产品型号Product Model: J61Y
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、蒸汽、腐蚀性等
Water, steam, corrosive, etc



电动焊接截止阀
ELECTRIC WELDING GLOBE VALVE

产品型号Product Model: J961Y
公称通径Nominal Diameter: 10~125mm
公称压力Nominal Pressure: 100V, 140V, 170V
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽
Water, oil, steam



阀套式排污阀
VALVE COVER TYPE DRAIN VALVE

产品型号Product Model: TP41Y
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~16MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
石油、天然气
Oil, natural gas



真空截止阀
VACUUM GLOBE VALVE

产品型号Product Model: JK41H/Y
公称通径Nominal Diameter: JK41H/Y
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸汽
Water, steam



锻钢低温截止阀
FORGING STEEL GLOBE VALVES AT LOW TEMPERATURE

产品型号Product Model: DJ61Y
公称通径Nominal Diameter: 10~50mm
公称压力Nominal Pressure: 800Lb
适用温度Suitable temperature: ≥196°C
适用介质Suitable Medium:
水、油品、蒸汽
Water, oil, steam



低温截止阀
LOW TEMPERATURE GLOBE VALVE

产品型号Product Model: DJ41W
公称通径Nominal Diameter: 50~300mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: ≥-196°C
适用介质Suitable Medium:
水、油品、蒸汽、硝酸、尿素
Water, steam, oil products, nitric acid, urea



法兰柱塞阀
FLANGE PISTON VALVE

产品型号Product Model: U41SM
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~2.5MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽
Water, oil products, steam



内螺纹柱塞阀
FLANGE GATE VALVE

产品型号Product Model: U11SFM
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、蒸汽
Water, oil products, steam



锻钢截止阀
FORGING STEEL GLOBE VALVE

产品型号Product Model: J11HY
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 800~2500Lb
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽
Water, oil, steam



截止阀
GLOBE VALVE

产品型号Product Model: JY44W
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~42MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、蒸汽
Water, steam



节能柱塞阀
ENERGY-SAVING PISTON VALVE

产品型号Product Model: U41SM
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~25MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、蒸汽
Water, oil products, steam



法兰闸阀
FLANGE GATE VALVE

产品型号Product Model: U41SM
公称通径Nominal Diameter: 50~500mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、蒸汽
Water, oil products, steam

截止阀系列

GLONBE VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

球阀系列

BALL VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



平衡式柱塞阀
BALANCE TYPE PISTON VALVE

产品型号Product Model: U46SM
公称口径Nominal Diameter: 15~400mm
公称压力Nominal Pressure: 1.6~2.58MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、蒸汽
Water, oil products, steam



燃气截止阀
GAS CUT-OFF VALVE

产品型号Product Model: J41N
公称口径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~80°C
适用介质Suitable Medium:
天然气、液化石油气等
Natural gas, liquefied petroleum gas, etc



法兰浮动球阀
FLANGE FLOATING BALL VALVE

产品型号Product Model: Q41F
公称口径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~16MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、蒸汽、油品、酸类
Water, steam, oil, acid



法兰不锈钢球阀
FLANGE STAINLESS STEEL BALL VALVE

产品型号Product Model: Q41F
公称口径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~16MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、蒸汽、油品、酸类
Water, steam, oil, acid



燃气日式截止阀
GAS JAPANESE GLOBE VALVE

产品型号Product Model: JY41F
公称口径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~220°C
适用介质Suitable Medium:
煤气、天然气及液化石油气
Coal gas, natural gas and liquid petroleum gas



燃气紧急切断阀
GAS EMERGENCY CUT-OFF VALVE

产品型号Product Model: ZCRB
公称口径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~220°C
适用介质Suitable Medium:
煤气、天然气及液化石油气
Coal gas, natural gas and liquid petroleum gas



美标球阀
AMERICAN STANDARD BALL VALVE

产品型号Product Model: Q41F
公称口径Nominal Diameter: 1/2~28
公称压力Nominal Pressure: 150~900LB
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、蒸汽等
Water, oil, steam, etc



固定球阀
AMERICAN STANDARD BALL VALVE

产品型号Product Model: Q47F
公称口径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~10.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、气、油品、天然气
Water, gas, oil and natural gas



气动紧急切断阀
PNEUMATIC EMERGENCY CUT-OFF VALVE

产品型号Product Model: QDQ421F
公称口径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 2.5~4.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
天然气、液化气
Natural gas, liquefied gas



液动紧急切断阀
HYDRAULIC EMERGENCY CUT-OFF VALVE

产品型号Product Model: DQY421F
公称口径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
天然气、液化气、液氨
Natural gas, liquefied petroleum gas, liquid ammonia



美标固定球阀
AMERICAN STANDARD FIXED BALL VALVE

产品型号Product Model: Q347F
公称口径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 150~900LB
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、气、油品、天然气
Water, gas, oil and natural gas



蜗轮式球阀
WORM GEAR TYPE BALL VALVE

产品型号Product Model: Q341F
公称口径Nominal Diameter: 15~500mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、蒸汽、油品、酸类
Water, steam, oil, acid



手动带气动紧急切断阀
MANUAL WITH PNEUMATIC EMERGENCY CUT-OFF VALVE

产品型号Product Model: SDQD421F
公称口径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
氨气、天然气、液化气
Ammonia gas, natural gas, liquefied gas



气动切断阀
PNEUMATIC CUT-OFF VALVE

产品型号Product Model: QDQ 641F
公称口径Nominal Diameter: 50~300mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
天然气、液化气、液氨
Natural gas, liquefied petroleum gas, liquid ammonia



气动法兰球阀
PNEUMATIC FLANGED BALL VALVES

产品型号Product Model: Q641F/H
公称口径Nominal Diameter: 50~800mm
公称压力Nominal Pressure: 1.6~40MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、硝酸等
Water, oil, nitric acid, etc



抗硫固定式球阀
SULFUR RESISTANCE FIXED BALL VALVE

产品型号Product Model: Q347F/Q947F
公称口径Nominal Diameter: 25~800mm
公称压力Nominal Pressure: 1.6~25.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气、蒸汽
Water, oil, gas, acids, etc

球阀系列

BALL VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



偏心半球阀 ECCENTRIC HALF BALL VALVE

产品型号Product Model: PQ347F/H
公称通径Nominal Diameter: 25~1000mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品、泥砂、煤粉、灰渣、颗粒状介质等
Water, steam, oil products, mud and sand, coal Ash, granular media, etc



电动四通球阀 ELECTRIC FOUR BALL VALVE

产品型号Product Model: Q946F
公称通径Nominal Diameter: 15~1200mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、蒸气、油品、硝酸类、醋酸类等
Water, steam, oil products, nitric acid kind, Acetic acid kind and

球阀系列

BALL VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



一体式球阀 ONE-PIECE BALL VALVE

产品型号Product Model: Q41F
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.6~16MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、油、汽等耐蚀和腐蚀性介质
Water, oil, steam corrosion resistant and corrupt sex medium



意式超薄型球阀 MEANING TYPE SUPER SLIM BALL VALVE

产品型号Product Model: Q73F
公称通径Nominal Diameter: Q73F
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water, oil, gas and some corrosive liquid



电动球阀 ELECTRIC BALL VALVE

产品型号Product Model: Q947F
公称通径Nominal Diameter: 100~1000mm
公称压力Nominal Pressure: 1.6~100MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、油、蒸气等
Water, oil steam, etc



轨道硬密封球阀 RAIL HARD SEALING BALL VALVES

产品型号Product Model: GQ47F/H
公称通径Nominal Diameter: 15~600mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -196°C~425°C
适用介质Suitable Medium:
水、蒸气、油品、硝酸类、醋酸类、天然气、热油、LPG等
Water, steam, oil, products, nitric acid, kind acetic acid kind, natural gas, heat oil, LPG etc



三块式法兰球阀 THREE PIECES TYPE FLANGED BALL VALVES

产品型号Product Model: Q41F
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、油品、蒸汽
Water, oil, steam



二片式内螺纹球阀 TWO CHIP THREADED BALL VALVE

产品型号Product Model: Q11PPL
公称通径Nominal Diameter: 8~100mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
液体、气体、油品
Liquid, gas, oil



不锈钢三通球阀 STAINLESS STEEL TEE BALL VALVE

产品型号Product Model: Q44F/Q45F
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、蒸气、油品、酸、碱类
Water, steam, oil, acid alkali class



四通球阀 FOUR BALL VALVE

产品型号Product Model: Q46F
公称通径Nominal Diameter: 50~300mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、油、蒸气等
Water, oil steam, etc



广式法兰球阀 WIDE TYPE FLANGED BALL VALVES

产品型号Product Model: Q14F
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water, oil, gas and some corrosive liquid



整体式法兰保温球阀 INTEGRAL FLANGE INSULATION BALL VALVE

产品型号Product Model: QB41F
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
重油、胶类、腐蚀性介质
Heavy oil, glue kind, corrosive medium



真三通四密封球阀 TRUE TEE FOUR SEALING BALL VALVES

产品型号Product Model: Q44F/45F
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、蒸气、油品、酸、碱类
Water, steam, oil, acid alkali class



不锈钢高温球阀 HIGH TEMPERATURE STAINLESS STEEL BALL VALVE

产品型号Product Model: QQ41M
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.0~10.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、气、油品、天然气和酸碳 腐蚀性介质
Water, gas, oil, natural gas and carbon acid corrosive medium



不锈钢放料球阀 STAINLESS STEEL FEEDING BALL VALVES

产品型号Product Model: FQ41F
公称通径Nominal Diameter: 25~100mm
公称压力Nominal Pressure: 1.6~2.5MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
油品、酸类等
Oil, acid etc



V型球阀 V TYPE BALL VALVE

产品型号Product Model: VQ647H
公称通径Nominal Diameter: 25~300mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、溶剂、酸等
Water, solvents, acid, etc

球阀系列

BALL VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

球阀系列

BALL VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



高平台气动球阀 HIGH PLATFORM PNEUMATIC BALL VALVE

产品型号Product Model: Q641F
公称通径Nominal Diameter: 1.6~6.4MPa
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、硝酸等
Water, oil, nitric acid, etc



气动高平台球阀 PNEUMATIC HIGH PLATFORM BALL VALVE

产品型号Product Model: Q641F
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、气等
Water, oil, gas, etc



日标球阀 JAPANESE STANDARD BALL VALVE

产品型号Product Model: Q41F
公称通径Nominal Diameter: 50~600mm
公称压力Nominal Pressure: 10K~40K
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、蒸气、油
Water, steam, oil



液压球阀 HYDRAULIC BALL VALVE

产品型号Product Model: YJZQ
公称通径Nominal Diameter: 6~50mm
公称压力Nominal Pressure: 16.0~42.0MPa
适用温度Suitable temperature: -29°C~80°C
适用介质Suitable Medium:
液压、油、水、乙二醇
Hydraulic, oil, water, glycol



三片式高平台球阀 3 CHIP HIGH PLATFORM BALL VALVE

产品型号Product Model: Q11F
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、蒸气
Water, oil, steam



不锈钢电动球阀 STAINLESS STEEL ELECTRIC BALL VALVE

产品型号Product Model: Q941F
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、溶剂、酸等
Water, solvents, acid, etc



高压锻钢球阀 HIGH-PRESSURE FORGING STEEL BALL VALVE

产品型号Product Model: Q41F
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 16.0~42.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气、酸类等
Water, oil, gas, acid, etc



硬密封球阀 HARD SEALING BALL VALVES

产品型号Product Model: Q41Y/Q47H
公称通径Nominal Diameter: 50~800mm
公称压力Nominal Pressure: 150~1500Lb
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油、气、酸类等
Water, oil, gas, acids, etc



电动碳钢法兰球阀 ELECTRIC CARBON STEEL FLANGED BALL VALVES

产品型号Product Model: Q9411F
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、蒸气、硝酸
Water, oil steam, nitric acid



高平台球阀 HIGH PLATFORM BALL VALVE

产品型号Product Model: Q41F
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、蒸气等
Water, oil, steam, etc



高压锻钢球阀 HIGH-PRESSURE FORGING STEEL BALL VALVE

产品型号Product Model: Q41F
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 16.0~42.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气、酸类等
Water, oil, gas, acid, etc



锻钢球阀 FORGING STEEL BALL VALVE

产品型号Product Model: Q61W
公称通径Nominal Diameter: 1/2"~2"
公称压力Nominal Pressure: 150~600Lb
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油、气
Water, oil, gas



气动高温球阀 PNEUMATIC HIGH TEMPERATURE BALL VALVE

产品型号Product Model: QJ641M
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、油、蒸气
Water, oil, steam



电动高温球阀 ELECTRIC HEAT BALL VALVE

产品型号Product Model: QZ941M
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、蒸气、酸碱类
Water, oil, steam, acid and alkali class



二片式高压内螺纹球阀 TWO TYPE HIGH PRESSURE THREADED BALL VALVE

产品型号Product Model: Q11N
公称通径Nominal Diameter: 6~50mm
公称压力Nominal Pressure: 10.0~32.0MPa
适用温度Suitable temperature: -29°C~80°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water, oil, gas and somecorrosive liquid



高压对焊球阀 HIGH-PRESSURE BUTT WELD BALL VALVE

产品型号Product Model: Q71F
公称通径Nominal Diameter: 10~100mm
公称压力Nominal Pressure: 16.0~32.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water, oil, gas and some corrosive liquid

球阀系列

BALL VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



耐磨陶瓷球阀
WEAR-RESISTING CERAMICS BALL VALVE

产品型号Product Model: Q41TF
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、蒸汽、酸性介质等
Coal, coal, powder particles



斜面上装式球阀
FLANGE GATE VALVE

产品型号Product Model: YHQ41S/H.Y.W
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 0.6~6.4MPa
-29°C~425°C-29°C~600°C
适用介质Suitable Medium:
水、油、气
Water, oil, gas



缩径焊接球阀
SHRINK DIAMETER WELDING BALL VALVE

产品型号Product Model: Q61F
公称通径Nominal Diameter: 125~600mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
天然气、煤气
Natural gas, coal gas



缩径法兰焊接球阀
SHRINK DIAMETER WELDING FLANGES BALL VALVE

产品型号Product Model: Q41F
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
天然气、煤气
Natural gas, coal gas



耐磨球阀
WEAR-RESISTING BALL VALVE

产品型号Product Model: NQ347TC
公称通径Nominal Diameter: 25~500mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil



蜗轮固定球阀
WORM GEAR FIXED BALL VALVE

产品型号Product Model: Q347F
公称通径Nominal Diameter: 32~700mm15~800mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、蒸、气油品
Water, steam, oil



缩径焊接球阀
SHRINK DIAMETER WELDING BALL VALVE

产品型号Product Model: Q61F
公称通径Nominal Diameter: 10~200mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
天然气、煤气
Natural gas, coal gas



通径焊接球阀
SIZE WELDING BALL VALVE

产品型号Product Model: Q62F
公称通径Nominal Diameter: 15~150mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
天然气、煤气
Natural gas, coal gas



上装式偏心球阀
JACKET TYPE ECCENTRIC BALL VALVE

产品型号Product Model: SQ340H
公称通径Nominal Diameter: 40~1000mm
公称压力Nominal Pressure: 1.0~10.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil



气动O型切断球阀
PNEUMATIC TYPE O CUTTING BALL VALVE

产品型号Product Model: ZSHO
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~10.0MPa
适用温度Suitable temperature: -29°C~200°C
适用介质Suitable Medium:
蒸汽、水
Steam water



埋地焊接球阀
BURIED WELDING BALL VALVE

产品型号Product Model: MQ61F
公称通径Nominal Diameter: 50~600mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
天然气、煤气
Natural gas, coal gas



螺纹/焊接球阀
THREADED/WELDING BALL VALVE

产品型号Product Model: Q63F
公称通径Nominal Diameter: 10~50mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
天然气、煤气
Natural gas, coal gas



气动带手动偏心球阀
PNEUMATIC WITH MANUAL ECCENTRIC BALL VALVE

产品型号Product Model: PQ647FY
公称通径Nominal Diameter: 25~800mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品、燃气
Water, steamoil, and gas



电动偏心半球阀
ELECTRIC ECCENTRIC HALF BALL VALVE

产品型号Product Model: PQ94F/Y/H
公称通径Nominal Diameter: 40~800mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
煤粉、煤灰、含尘、气体
Coal, coal ash, dusty, gas



埋地式保温焊接球阀 BQ61/7F
BURIED TYPE THERMAL INSULATION WELDED BALL VALVE BQ61/7F

应用规范
1、设计、制造按GB12237-89的规定。
2、结构长度按CVA7.1-83的规定。
3、阀门的试验标准按ZBJ16006-90的规定。
4、保温层的技术要求参照津Q/GY07-01-87的规定。

阀门性能规范

1、工作压力:不大于阀门的公称压力。
2、工作温度: -29°C~250°C
主体材料:WCB, ZH1Cr18Ni9, ZGCr18Ni12Mo2Ti.

APPLICATION STANDARD

1. The design, the manufacture according to the provitions of the GB12237-89
2. Structure length CVA7.1-83 according to the regulations.
3. The valve test standard according to the provisions of the ZBJ16006-90
4. Thermal insulation layer with reference to the technical requirements of the tianjin Q/GY07-01-87 rules

Valve performance standard

1. Working pressure: no greater than the nominal pressureof the valve.
2. Working temperature: -29°C~250°C
The main materialsWCB, ZH1Cr18Ni9, ZGCr18Ni12Mo2Ti7 rules

球阀系列

BALL VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



高性能管线球阀
HIGH-PERFORMANCE LINE BALL VALVE
产品型号Product Model: Q961F
公称通径Nominal Diameter: 15~1400mm
公称压力Nominal Pressure: 1.6~42.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
气体
Gas



大口径埋地焊接球阀
LARGE DIAMETER BURIED WELDING BALL VALVE
产品型号Product Model: MQ367F
公称通径Nominal Diameter: 15~1200mm
公称压力Nominal Pressure: 0.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
燃气、煤气
Gas, coal gas



加长阀杆埋地燃气球阀
EXTENDED STEM BURIED GAS BALL VALVE
产品型号Product Model: Q361F
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、空气、天然气
Water, air and antural gas



埋地式全焊接球阀
BURIED IN THE WELDING BALL VALVE
产品型号Product Model: FQ361F
公称通径Nominal Diameter: 50~1200mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
天然气、水、油品
Natural gas, Water, oil



埋地式全球阀
BURIED IN THE WELDING BALL VALVE
产品型号Product Model: MQ361F
公称通径Nominal Diameter: 15~1200mm
公称压力Nominal Pressure: 10.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
燃气、煤气
Gas, coal gas



全焊接球阀
ALL WELDING BALL VALVE
产品型号Product Model: Q361F
公称通径Nominal Diameter: 50~1400mm
公称压力Nominal Pressure: 1.6~42.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
石油、天然气
Oil, natural gas



全焊接球阀
ALL WELDING BALL VALVE
产品型号Product Model: Q961F
公称通径Nominal Diameter: 50~1400mm
公称压力Nominal Pressure: 1.6~42.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
石油、天然气
Oil, natural gas



放散发直埋式球阀
ELECTRIC ECCENTRIC HALF BALL VALVE
产品型号Product Model: PQ94F/Y/H
公称通径Nominal Diameter: 40~800mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
煤粉、煤灰、含灰、气体
Coal, coal ash, dusty, gas

锻钢阀系列

FORGED STEE VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



锻钢闸阀
FORGED STEEL GATE VALVE
产品型号Product Model: Z41W
公称通径Nominal Diameter: 10~50mm
公称压力Nominal Pressure: 1.6~42.0MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil



放空导淋阀
VENT VALVE GUIDE POUR
产品型号Product Model: Z41W
公称通径Nominal Diameter: 10~50mm
公称压力Nominal Pressure: 1.6~42.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、石油、天然气等
Water, oil, natural gas, etc



美标锻钢闸阀
AMERICAN STANDARD FORGED STEEL GATE VALVE
产品型号Product Model: Z41
公称通径Nominal Diameter: 3/8"~2"
公称压力Nominal Pressure: 150~2500Lb
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、石油、天然气等
Water, oil, natural gas, etc



锻钢截止阀
FORGED STEEL GLOBE VALVES
产品型号Product Model: J11H/Y
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 150~2500Lb
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、蒸气、油品、腐蚀性等
Water, steam, oil products, corrosive, etc



锻钢截止阀
FORGED STEEL GLOBE VALVES
产品型号Product Model: J41H/Y
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~42.0MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽、酸性介质等
Water, oil, steam acid medium etc



锻钢法兰止回阀
FORGING STEEL FLANGE CHECK VALVE
产品型号Product Model: H41H/W
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 2.5~10.0MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、蒸气、油品、其他腐蚀性介质
Water, steam, oil products, other corruption Erosion media



锻钢焊接止回阀
FORGING STEEL WELDING CHECK VALVE
产品型号Product Model: H11H
公称通径Nominal Diameter: 10~50mm
公称压力Nominal Pressure: 1.0~16.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽
Water, oil, steam



锻钢止回阀
FORGING STEEL CHECK VALVE
产品型号Product Model: H61W
公称通径Nominal Diameter: 15~15mm
公称压力Nominal Pressure: 1.0~16.0MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil

止回系列

CHECH VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

止回阀系列

CHECH VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



不锈钢升降式止回阀 STAINLESS STEEL MOVEMENTS OF CHECK VALVE

产品型号Product Model: H41W/H
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.0~16.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、蒸气、油品、其他腐蚀性介质
Water, steam, oil products, other corruption
Erosion media



水压试验阀(堵阀) HYDROSTATIC TEST VALVES(PLUGGING VALVE)

产品型号Product Model: SY60X
公称通径Nominal Diameter: 6"~36"
公称压力Nominal Pressure: 600~2500Lb
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、蒸气等
Water steam, etc



美标蝶式止回阀 AMERICAN STANDARD BUTTERFLY CHECK VALVE

产品型号Product Model: H76H/W
公称通径Nominal Diameter: 50~600mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品、其他腐蚀性介质
Water, steam, oil products, other corruption
Erosion media



电站止回阀 POWER STATION CHECK VALVE

产品型号Product Model: H64H/Y
公称通径Nominal Diameter: 2"~24"
公称压力Nominal Pressure: 600~2500Lb
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、蒸气
Water, steam



不锈钢旋启式止回阀 STAINLESS STEEL SWING CHECK VALVE

产品型号Product Model: H44W/H
公称通径Nominal Diameter: 15~900mm
公称压力Nominal Pressure: 1.0~16.0MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、蒸气、油品、其他腐蚀性介质
Water, steam, oil products, other corruption
Erosion media



高压止回阀 HIGH PRESSURE CHECK VALVE

产品型号Product Model: 42H/Y
公称通径Nominal Diameter: 25~125mm
公称压力Nominal Pressure: 10.0~42.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、蒸气等
Water steam, etc



底阀 BOTTOM VALVE

产品型号Product Model: H12W/H H42
公称通径Nominal Diameter: 15~600mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品、其他腐蚀性介质
Water, steam, oil products, other corruption
Erosion media



水压试验阀(堵阀) HYDROSTATIC TEST VALVES(PLUGGING VALVE)

产品型号Product Model: SY60X
公称通径Nominal Diameter: 6"~36"
公称压力Nominal Pressure: 600~2500Lb
适用温度Suitable temperature: -29°C~80°C
适用介质Suitable Medium:
水、蒸气
Water, steam



不锈钢立式止回阀 STAINLESS STEEL VERTICAL CHECK VALVE

产品型号Product Model: H42W/H
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、蒸气、油品、其他腐蚀性介质
Water, steam, oil products, other corruption
Erosion media



H72对夹式止回阀 H72 WAFER CHECK VALVE

产品型号Product Model: H71W/H
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
油、水、酸碱等液体
Oil, water and soda acid liquid



旋启式止回阀 SWING CHECK VALVES

产品型号Product Model: H44H
公称通径Nominal Diameter: 15~500mm
公称压力Nominal Pressure: 1.6~2.5MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽、等
Water, oil, steam, etc



立卧两用止回阀 LIE DOWN AND MADE THE CHECK VALVE

产品型号Product Model: H41/2H
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、蒸汽、等
Water, oil, steam, etc



美标铸钢止回阀 AMERICAN STANDARD CAST STEEL CHECK VALVE

产品型号Product Model: H44W
公称通径Nominal Diameter: 2"~16"
公称压力Nominal Pressure: 150~900Lb
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、蒸气、油品、其他腐蚀性介质
Water, steam, oil products, other corruption
Erosion media



超薄型止回阀 FLANGE GATE VALVE

产品型号Product Model: H74W/H
公称通径Nominal Diameter: 40~400mm
公称压力Nominal Pressure: 1.6~2.5MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
油、水、酸碱等液体
Oil, water and soda acid liquid



抽气止回阀 SWING CHECK VALVE

产品型号Product Model: H664H
公称通径Nominal Diameter: 18"~42"
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气
Water, steam



电站止回阀 POWER STATION CHECK VALVE

产品型号Product Model: H61Y
公称通径Nominal Diameter: 10~600mm
公称压力Nominal Pressure: 25.0~32.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil

蝶阀系列

BUTTERFLY VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

蝶阀系列

BUTTERFLY VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



法兰式硬密封蝶阀

FLANGE HARD SEALING BUTTERFLY VALVE

产品型号Product Model: D343H
公称通径Nominal Diameter: 50~1200mm
公称压力Nominal Pressure: 0.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
蒸气、油品、酸类、海水等
Steam, oil acid, sea water, etc



对焊式三偏心多层次硬密封蝶阀

BUTT IN THREE ECCENTRIC MULTI-LEVEL HARD SEALING BUTTERFLY VALVE

产品型号Product Model: D363H
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、热空气、煤气、油品、天然气等
Water, hot air, steam, gas, Oil natural gas



法兰式伸缩蝶阀

FLANGE TELESCOPIC BUTTERFLY VALVE

产品型号Product Model: SD343H/F/X
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.6~1.6MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、空气等
Water, oil, air, etc



不锈钢四氟对夹蝶阀

STAINLESS STEEL FOUR FLUORINE FOR BUTTERFLY VALVES

产品型号Product Model: D371X
公称通径Nominal Diameter: 40~800mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
各种腐蚀性介质
All kinds of corrosive medium



蜗轮传动蝶阀法兰型

WORM GEAR BUTTERFLY VALVE FLANGE TYPE

产品型号Product Model: 343H
公称通径Nominal Diameter: 100~1000mm
公称压力Nominal Pressure: 2.5~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
煤气、含尘气体、烟道气等
Gas, dust-contained gas, such as black



气动法兰式硬密封蝶阀

PNEUMATIC FLANGE HARD SEALING BUTTERFLY VALVE

产品型号Product Model: D673H
公称通径Nominal Diameter: 50~1200mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、空气、天然气、油品及弱腐蚀性流体
Water, air, gas, oil and Weak corrosive fluids



加长法兰式硬密封蝶阀

EXTENDED FLANGE HARD SEALING BUTTERFLY VALVE

产品型号Product Model: D343H
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、空气、天然气、油品及弱腐蚀性流体
Water, air, gas, oil and Weak corrosive fluids



蜗轮法兰蝶阀

WORM GEAR FLANGED BUTTERFLY VALVE

产品型号Product Model: D341X
公称通径Nominal Diameter: 50~1400mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、油品、气体等
Water, oil, gas, etc



对夹式三偏心多层次硬密封蝶阀

THIS TRIPLE ECCENTRIC MULTI-LEVEL HARD SEALING BUTTERFLY VALVE

产品型号Product Model: D373H
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、空气、天然气、油品及弱腐蚀性流体
Water, air, gas, oil and Weak corrosive fluids



电动对夹式硬密封蝶阀

ELECTRIC WAFER HARD SEALING BUTTERFLY VALVE

产品型号Product Model: D973H
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、空气、天然气、油品及弱腐蚀性流体
Water, air, gas, oil and Weak corrosive fluids



不锈钢手柄对夹式蝶阀

STAINLESS STEEL HANDLE WAFER BUTTERFLY VALVES

产品型号Product Model: D71X
公称通径Nominal Diameter: 50~150mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、油品、气体等
Water, oil, gas, etc



对夹式中线蝶阀

THIS CENTRAL LINE BUTTERFLY VALVE

产品型号Product Model: D37A1X
公称通径Nominal Diameter: 50~1200mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、空气、油等
Water, air, oil, etc



法兰式通风蝶阀

FLANGE TYPE VENTILATION BUTTERFLY VALVE

产品型号Product Model: D343W/H
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.05~0.6MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
煤气、含尘气体、烟道气等
Gas, dust-contained gas, such as black



气动对夹式蝶阀

PNEUMATIC WAFER BUTTERFLY VALVE

产品型号Product Model: D671X
公称通径Nominal Diameter: 40~400mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、气、油品等
Water, gas, oil, etc



不锈钢四氟气动蝶阀

STAINLESS STEEL FOUR FILUORING PNEUMATIC BUTTERFLY VALVE

产品型号Product Model: D671F
公称通径Nominal Diameter: 40~800mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
各种腐蚀性介质
All kinds of corrosive medium



消防信号蝶阀

FIRE CONTROL SIGNAL BUTTERFLY VALVE

产品型号Product Model: D371X
公称通径Nominal Diameter: 50~350mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、油品、气体等
Water, oil, gas, etc

蝶阀系列

BUTTERFLY VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



电动环氧覆层四氟蝶阀
ELECTRIC EPOXY COATING LAYER FOUR FLUORINE BUTTERFLY VALVE

产品型号Product Model: D971F
公称通径Nominal Diameter: 40~2000mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
耐酸、碱、海水、污水、油、气等
Acid, alkali, sea water, sewage, oil, gas and other



蜗轮对夹式不锈钢板四氟蝶阀
WORM GEAR WAFER STAINLESS STEEL PLATE FOUR FLUORINE BUTTERFLY VALVE

产品型号Product Model: D371F
公称通径Nominal Diameter: 40~2000mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
酸、碱、海水、污水、气、油品等
Acid, alkali, sea water, sewage, gas, oil etc



中线蝶阀
MIDLINE BUTTERFLY VALVE

产品型号Product Model: D71X
公称通径Nominal Diameter: 40~600mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
耐酸、碱、海水、污水、油、气等
Acid, alkali, sea water, sewage, oil, gas and other



管网法兰蝶阀
PIPE NETWORK FLANGED BUTTERFLY VALVE

产品型号Product Model: D341X
公称通径Nominal Diameter: 40~1200mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、气、油品等
Water, gas, oil, etc



蜗轮对夹式全不锈钢蝶阀
THIS TRIPLE ECCENTRIC MULTI-LEVEL HARD SEALING BUTTERFLY VALVE

产品型号Product Model: D371F
公称通径Nominal Diameter: 40~1200mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
耐酸、碱、海水、污水、油、气等
Acid, alkali, sea water, sewage, oil, gas and other



蓄能罐式液控缓闭止回蝶阀
STORAGE TANK HYDRAULIC CONTROLLED SLOWLY-CLOSING CHECK BUTTERFLY VALVE

产品型号Product Model: DX7K41X/H
公称通径Nominal Diameter: 100~4000mm
公称压力Nominal Pressure: 0.25~1.0MPa
适用温度Suitable temperature: -29°C~80°C
适用介质Suitable Medium:
X密封: 水、油品及其它腐蚀性液体
H密封: 煤气、蒸汽及其它废气
X seat water, oil and other corrosion sex liquid,
H seat the gas, steam and other waste gas



电动法兰蝶阀
ELECTRIC FLANGED BUTTERFLY VALVE

产品型号Product Model: D941X
公称通径Nominal Diameter: 40~1200mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、气、油品等
Water, gas, oil, etc



电动对夹式蝶阀(LQ型)
ELECTRIC WAFER BUTTERFLY VALVE (LQ TYPE)

产品型号Product Model: D971X
公称通径Nominal Diameter: 40~1200mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、气、油品等
Water, gas, oil, etc

安全阀系列

RELIEF VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



弹簧微启封闭式安全阀
SPRING MICRO REV ENDSOSE THE RELIEF VALVE

产品型号Product Model: A41H/Y
公称通径Nominal Diameter: 20~250mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
石油、空气、水
The oil, water and air



弹簧全启封闭式安全阀
THE REV. ENCLOSED THE RELIEF VAVE SPRING

产品型号Product Model: A42Y
公称通径Nominal Diameter: 20~350mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
变动背压、有毒易燃或腐蚀性
Change back pressure, toxic flammable or corrosive



带扳手弹簧微启式安全阀
WITH WRENCH SPRING MICRO REV TYPE THE RELIEF VALVE

产品型号Product Model: A47H
公称通径Nominal Diameter: 20~250mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
蒸气、空气等
Steam, air, etc



高温高压弹簧全启式安全阀
THE REV. TYPE HIGH TEMPERATUER AND HIGH PRESSURE RELIEF VALVE SPRING

产品型号Product Model: A48SB
公称通径Nominal Diameter: 25~200mm
公称压力Nominal Pressure: 6.4~16.0MPa
适用温度Suitable temperature: -29°C~550°C
适用介质Suitable Medium:
蒸气
Steam



弹簧微启式外螺纹安全阀
SPRING MICOR REV TYPE REFLIEF VALVE THREADS

产品型号Product Model: A21H
公称通径Nominal Diameter: 15~25mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~30°C
适用介质Suitable Medium:
空气、氨、石油、气等
Air, ammonia, oil, gas, etc



弹簧微启式安全阀
SPRING MICOR REV TYPE THE RELIEF VALVE

产品型号Product Model: A27X
公称通径Nominal Diameter: 15~80mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
水、空气、蒸气等
Water, air, steam, etc



带手柄弹簧全启式安全阀
TAKE THE HANDLE ALL THE REV. TYPE THE RELIEFVALVE SPRING

产品型号Product Model: A28HA28Y-16/25/40P/R
公称通径Nominal Diameter: 1.6~4.0MPa
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
蒸气、水、氨氮混合等
All, steam, water, nitrogenhydrogen mix gas and sn on



德标安全阀
DIN RELIEF VALVE

产品型号Product Model: 900
公称通径Nominal Diameter: 20~250mm
公称压力Nominal Pressure: 4.0~16.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
石油、天然气、化工、电力、城市燃气等
Oil, natural gas, chemical industry, electric power, city gas, etc

安全阀系列

RELIEF VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

冶金阀系列

METALLURGICAL VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



洁净系统不锈钢安全阀 TYPE REV. ENCLOSED THE RELIEF VALVE SPRING

产品型号Product Model: SVL488
公称口径Nominal Diameter: 进口1"~2",出口1"~3"
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
蒸气、气体和液体
Steam, gas and liquid



双联弹簧式安全阀 DOUBLE SPRING TYPE VALVE

产品型号Product Model: A38Y
公称口径Nominal Diameter: 25~200mm
公称压力Nominal Pressure: 1.6~4.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
蒸气、空气
Steam, air



手动扇形盲板阀 MANUAL FAN-SHAPED BLIND PLATE VALVES

公称口径Nominal Diameter: 100~1400mm
公称压力Nominal Pressure: 0.05~0.25MPa
适用温度Suitable temperature:
200°C(硅橡胶)300°C(氟橡胶)
结构形式Suitable Form:短系列(Work water depth)
适用介质Suitable Medium:
煤气及有毒、有害、易燃气体
Gas and poisonous,harmfulflammable gas



气动扇形盲板阀 PNEUMATIC FAN-SHAPED BLIND PLATE VALVES

公称口径Nominal Diameter: 300~1200mm
公称压力Nominal Pressure: 0.05~0.25MPa
适用温度Suitable temperature:
200°C(硅橡胶)300°C(氟橡胶)
适用介质Suitable Medium:
煤气及有毒、有害、易燃气体
Gas and poisonous,harmfulflammable gas



弹簧全启封闭式变压安全阀 SPRING ALL THE REV. ENCLOSED VARIABLEPRESSURE RELIEF VALVE

产品型号Product Model: A42Y-50
公称口径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
氨、氮、混合气
Nitrogenand hydrogen, the mixture



平行式安全回流阀 PARALLEL TYPE SAFETY BACKFLOW PREVENTER

产品型号Product Model: AHN42F
公称口径Nominal Diameter: 40~150mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
石油
Oil



电动扇形盲板阀 ELECTRIC FAN BLIND PLATE VALVES

公称口径Nominal Diameter: 300~1800mm
公称压力Nominal Pressure: 0.05~0.25MPa
适用温度Suitable temperature:
200°C(硅橡胶)300°C(氟橡胶)
适用介质Suitable Medium:
煤气及有毒、有害、易燃气体
Gas and poisonous,harmfulflammable gas



敞开式插板阀 THE REV. TYPE HIGH TEMERATUER AND HIGH PRESSURE RELIEF VALVE SPRING

公称口径Nominal Diameter: 400~2800mm
公称压力Nominal Pressure: 0.05~0.25MPa
适用温度Suitable temperature:
200°C(硅橡胶)300°C(氟橡胶)
驱动方式Driving mode:电动、液动、气动、电液动
Electric, hydraulic, pneumatic,electric hydraulic
适用介质Suitable Medium:
煤气及有毒、有害、易燃气体
Gas and poisonous,harmfulflammable gas



双杠杆安全阀 DOUBLE LEVEN AGE THE RELIEF VALVE

产品型号Product Model: GA44H
公称口径Nominal Diameter: 80mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
蒸气、空气
Steam, air



单杠杆安全阀 SINGLE LEVER RELIEF VALVE

产品型号Product Model: GA471H
公称口径Nominal Diameter: 25~200mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
蒸气、空气
Steam, air



齿圈式扇形盲板阀 TOOTH CIRCLE TYPE FAN CLOSURE VALVES

公称口径Nominal Diameter: 300~1800mm
公称压力Nominal Pressure: 0.05~0.25MPa
适用温度Suitable temperature:
200°C(硅橡胶)300°C(氟橡胶)
适用介质Suitable Medium:
煤气及有毒、有害、易燃气体
Gas and poisonous,harmfulflammable gas



手动扇形盲板阀 MANUAL FAN-SHAPED BLIND PLATE VALVES

公称口径Nominal Diameter: 300~1400mm
公称压力Nominal Pressure: 0.05~0.25MPa
适用温度Suitable temperature:
200°C(硅橡胶)300°C(氟橡胶)
适用介质Suitable Medium:
煤气及有毒、有害、易燃气体
Gas and poisonous,harmfulflammable gas



主安全阀 THE RELIEF VALVE

产品型号Product Model: A49H
公称口径Nominal Diameter: 25~250mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
蒸气、空气
Steam, air



脉冲式安全阀 PULSED RELIEF VALVE

产品型号Product Model: GA49H-4、DN25
公称口径Nominal Diameter: 25~50mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
蒸所、水、气、油
Steam, water, gas, oil



法兰闸阀 MANUAL FAN-SHAPED BLIND PLATE VALVES

公称口径Nominal Diameter: 100~1400mm
公称压力Nominal Pressure: 0.05~0.25MPa
适用温度Suitable temperature:
-40°C~250°C(氟橡胶)
结构形式Suitable Form:长系列(Work water depth)
适用介质Suitable Medium:
煤气及有毒、有害、易燃气体
Gas and poisonous,harmfulflammable gas



液动扇形盲板阀 HYDRAULIC FAN-SHAPED BLIND PLATE VALVES

公称口径Nominal Diameter: 300~1800mm
公称压力Nominal Pressure: 0.05~0.25MPa
适用温度Suitable temperature:
200°C(硅橡胶)300°C(氟橡胶)
适用介质Suitable Medium:
煤气及有毒、有害、易燃气体
Gas and poisonous,harmfulflammable gas

冶金阀系列

METALLURGICAL VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

冶金阀系列

METALLURGICAL VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



封闭式插板阀 PLUG-IN BOARDS VALVE CLOSED

公称通径Nominal Diameter: 400~2800mm
公称压力Nominal Pressure: 0.05~0.25MPa
适用温度Suitable temperature:
200°C(硅橡胶)300°C(氟橡胶)
驱动方式Driving mode: 短系列(Work water depth)
适用介质Suitable Medium:
煤气及有毒、有害、易燃气体
Gas and poisonous,harmful flammable gas



封闭式插板阀 PLUG-IN BOARDS VALVE CLOSED

规格Specifications: 300X300~2500X2500mm
结构形式Structure form:
明杆、暗杆 Rising stem, dark bar)
安装形式Installation form:
法兰式、靠墙式 Flange, rely on the wall
驱动方式Driving mode:
手轮、手摇、手电两用
The handwheel; hand, flashlight amphibious
适用温度Suitable Medium: -29°C~60°C
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water



渠道闸门 CHANNEL GATE

规格Specifications: 300X300~2500X2500mm
结构形式Structure form:
明杆、暗杆 Rising stem, dark bar)
安装形式Installation form:
渠道式Channel type
驱动方式Driving mode:
手轮、手摇、手电两用
The handwheel; hand, flashlight amphibious
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
不锈钢、碳钢
Stainless steel, carbon steel



平板格栅 FLAT GRILLE

规格Specifications: 700X700~2000X2000mm
安装形式Installation form:
渠道式Channel type
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
不锈钢、碳钢
Stainless steel, carbon steel



镶铜铸铁圆闸门 COPPER IRON GATE WITH ROUND

规格Specifications: 300~2500
结构形式Structure form:
明杆、暗杆 Rising stem, dark bar
安装形式Installation form:
法兰式、靠墙式 Flange, rely on the wall
驱动方式Driving mode:
手轮、手摇、手电两用
The handwheel; hand, flashlight amphibious
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
不锈钢、碳钢
Stainless steel, carbon steel



调节闸门 REGULATION GATE

规格Specifications: 300X300~2500X2500mm
结构形式Structure form:
明杆、暗杆 Rising stem, dark bar
安装形式Installation form:
法兰式、靠墙式 Flange, rely on the wall
驱动方式Driving mode:
手轮、手摇、手电两用
The handwheel; hand, flashlight amphibious
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
不锈钢、碳钢
Stainless steel, carbon steel



拍门 CHANNEL GATE

规格Specifications: 300X300~2500X2500mm
结构形式Structure form:
方形、圆形 Square, the circular
安装形式Installation form:
法兰式Flange
驱动方式Driving mode:
手轮、手摇、手电两用
The handwheel; hand, flashlight amphibious
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
铸钢、钢制
Cast iron, steel



锥形阀 CONICAL VALVE

规格Specifications: 800~1600mm
结构形式Structure form:
法兰式 Flange
驱动方式Driving mode:
手电两用
flashlight amphibious
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
碳钢
Carbon steel



滑阀 ROTARY PISTONS

规格Specifications: 300~1200mm
结构形式Structure form:
明杆 Rising stem
安装形式Installation form:
法兰式 Flange
驱动方式Driving mode:
手轮、手摇、手电两用
The handwheel; hand, flashlight amphibious
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
铸铁
Cast iron



叠梁阀 FOLD BEAM VALVE

规格Specifications: 400X400~2000X2000mm
驱动方式Driving mode:
提拉
Tiras
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water



真空隔离阀 VACUUM ISOLATION VALVES

公称通径Nominal Diameter: 100~350mm
公称压力Nominal Pressure: 0.1 MPa
适用温度Suitable temperature: ≤300°C
驱动方式Driving mode:
手动、电动、气动、液动
Manual and electric pneumatic hydraulic
适用介质Suitable Medium:
干燥物质
Dry material



排泥阀 ROW MUD VALVES

规格Specifications: 150~500mm
安装形式Installation form:
不锈钢、碳钢 Stainless steel, carbon steel
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
工作水深Work Water depth:
小于10米
Less than 10m



螺旋式调节堰门 SCREW ADJUSTING BARRAGE THE DOOR

规格Specifications: YXT-2000~5000mm
结构形式Structure form:
明杆 Rising stem
安装形式Installation form:
不锈钢、碳钢Stainless steel, carbon steel
驱动方式Driving mode:
手轮、手摇、手电两用
The handwheel; hand, flashlight amphibious
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water



法兰闸阀 FLANGE GATE VALVE

结构形式Structure form:
明杆、暗杆 Rising stem, dark bar
安装形式Installation form:
法兰式、靠墙式 Flange, rely on the wall
驱动方式Driving mode:
手轮、手摇、手电两用
The handwheel; hand, flashlight amphibious
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
不锈钢、钢制
Cast iron, steel



自动煤气水封逆止阀 AUTOMATIC GAS STORAGE NON-RETURN VALVE

公称通径Nominal Diameter: 800~1800mm
公称压力Nominal Pressure: 0.01MPa
适用温度Suitable temperature: ≤120°C
驱动方式Driving mode:短系列(Work water depth)
适用介质Suitable Medium:
转炉煤气等
Converter gas, etc
启闭切换时间On-off switch time: ≤15秒



法兰闸阀 FLANGE GATE VALVE

结构形式Structure form: 300~2000mm
启闭力Opening and closing force:0.01MPa
适用温度Suitable temperature: 4~25T
电机功率Motor power:1.1~7.5W

冶金阀系列

METALLURGICAL VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

冶金阀系列

METALLURGICAL VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



配水阀 PLUG-IN BOARDS VALVE CLOSED

规格Specifications: 400~12000mm
安装形式Installation form:
法兰式 Flange
驱动方式Driving mode:
手轮、手摇、手电两用
The handwheel; hand, flashlight amphibious
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
碳钢
arbon steel



封闭式插板阀 PLUG-IN BOARDS VALVE CLOSED

规格Specifications: 300X300~2500X2500mm
启闭力Openingandclosingforce:
0.5~2T



渠道闸门 CHANNEL GATE

规格Specifications: 300X300~2500X2500mm
结构形式Structure form:
明杆、暗杆 Rising stem, dark bar
安装形式Installation form:
渠道式Channel type
驱动方式Driving mode:
手轮、手摇、手电两用
The handwheel; hand, flashlight amphibious
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
不锈钢、碳钢
Stainless steel, carbon steel



平板格栅 FLAT GRILLE

规格Specifications: 700X700~2000X2000mm
安装形式Installation form:
渠道式Channel type
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
不锈钢、碳钢
Stainless steel, carbon steel



镶铜铸铁圆闸门 COPPER IRON GATE WITH ROUND

规格Specifications: 300~2500
结构形式Structure form:
明杆、暗杆 Rising stem, dark bar
安装形式Installation form:
法兰式、靠墙式 Flange, rely on the wall
驱动方式Driving mode:
手轮、手摇、手电两用
The handwheel; hand, flashlight amphibious
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
适用温度Suitable Medium:-29°C~60°C



水冷式超高温蝶阀 WATER-COOLED SUPER HIGH TEMPERATURE BUTTERFLY VALVE

规格Specifications: 300X300~2500X2500mm
结构形式Structure form:
明杆、暗杆 Rising stem, dark bar
安装形式Installation form:
法兰式、靠墙式 Flange, rely on the wall
驱动方式Driving mode:
手轮、手摇、手电两用
The handwheel; hand, flashlight amphibious
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
不锈钢、碳钢
Stainless steel, carbon steel



拍门 CHANNEL GATE

规格Specifications: 300X300~2500X2500mm
结构形式Structure form:
方形、圆形 Square, the circular
安装形式Installation form:
法兰式 Flange
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
铸钢、钢制
Cast iron, steel)



锥形阀 CONICAL VALVE

规格Specifications: 800~1600mm
结构形式Structure form:
法兰式 Flange
安装形式Installation form:
渠道式Channel type
驱动方式Driving mode:
手电两用
Flashlight amphibious
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
碳钢
Carbon steel



滑阀 ROTARY PISTONS

规格Specifications: 300~1200mm
结构形式Structure form:
明杆 Rising stem,
安装形式Installation form:
法兰式 Flange
驱动方式Driving mode:
手轮、手摇、手电两用
The handwheel; hand, flashlight amphibious
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
铸铁
Cast iron



叠梁阀 FOLD BEAM VALVE

规格Specifications: 400X400~2000X2000mm
驱动方式Driving mode:
提拉
Tiras
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
铸铁
Cast iron



真空隔离阀 VACUUM ISOLATION VALVES

公称通径Nominal Diameter: 100~350mm
公称压力Nominal Pressure: 0.1 MPa
适用温度Suitable temperature: ≤300°C
驱动方式Driving mode:
手动、电动、气动、液动
Manual and electric pneumatic hydraulic
适用介质Suitable Medium:
干燥物质
Dry material



排泥阀 ROW MUD VALVES

规格Specifications: 150~500mm
安装形式Installation form:
不锈钢、碳钢
Stainless steel, carbon steel
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
工作水深Work Water depth:
小于10米
Less than 10m



螺旋式调节堰门 SCREW ADJUSTING BARRAGE THE DOOR

规格Specifications: YXT-2000~5000mm
结构形式Structure form:
不锈钢、碳钢
tainless steel, carbon steel
安装形式Installation form:
法兰式 Flange
驱动方式Driving mode:
手轮、手摇、手电两用
The handwheel; hand, flashlight amphibious
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water



调节堰门 ADJUST WEIR DOOR

结构形式Structure form:
明杆、暗杆 Rising stem, dark bar
安装形式Installation form:
法兰式、靠墙式 Flange, rely on the wall
驱动方式Driving mode:
手轮、手摇、手电两用
The handwheel; hand, flashlight amphibious
适用介质Suitable Medium:
污水、清水、海水
Sewage, water, and water
材质形式 Material form:
不锈钢、钢制
Cast iron, steel



自动煤气水封逆止阀 AUTOMATIC GAS STORAGE NON-RETURN VALVE

公称通径Nominal Diameter: 800~1800mm
公称压力Nominal Pressure: 0.01MPa
适用温度Suitable temperature: ≤120°C
适用介质Suitable Medium:
转炉煤气等
Converter gas, etc
启闭切换时间On-off switch time: ≤15秒



手电两用启闭机 A FLASHLIGHT AMPHIBIOUS HOIST

结构形式Structure form: 300~2000mm
适用温度Suitable temperature: 4~25T
电机功率Motor power: 1.1~7.5W

冶金阀系列

METALLURGICAL VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

冶金阀系列

METALLURGICAL VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



扇形闸阀 FAN-SHAPED GATE VALVES

公称通径Nominal Diameter: 200X200-1000X1000mm
适用温度Suitable temperature: $\leq 300^{\circ}\text{C}$
适用介质Suitable Medium:
干燥粉体
Dry powder
驱动方式Driving mode:
手动、电动、气动
Manual and electric pneumatic



斜式插板阀 INCLINED TYPE FLASHBOARD VALVE

公称通径Nominal Diameter: 100-150mm
适用温度Suitable temperature: $\leq 1500^{\circ}\text{C}$
适用介质Suitable Medium:
固体粉质
Solid powder
驱动方式Driving mode:
手拉
Hand in hand



棒条闸门 ARTICLE GREAT GATE

公称通径Nominal Diameter: 200X200-1000X1000mm
适用温度Suitable temperature: $\leq 300^{\circ}\text{C}$
适用介质Suitable Medium:
50mm以下干燥粉体物质
50mm the following dry powder material



TDSZ扇形闸门 TDSZ the valve

公称通径Nominal Diameter: 300X300-800X800mm
适用温度Suitable temperature: $\leq 300^{\circ}\text{C}$
适用介质Suitable Medium:
干燥粉体
Dry powder
驱动方式Driving mode:
电动推杆
Motor-driven push-d



防爆阀 EXPLOSION-PROOF VALVE

公称通径Nominal Diameter: 200-900mm
适用温度Suitable temperature: 0.1MPa
公称压力Nominal Pressure: $\leq 200^{\circ}\text{C}$
适用介质Suitable Medium:
压缩易爆气体
Compression and explosive gas
安装形式Installation form:
正装、侧装
Being installed, side with



除尘放散阀 DUST REMOVAL RADIATION VALVE

公称通径Nominal Diameter: 150-600mm
适用温度Suitable temperature: $\leq 300^{\circ}\text{C}$
公称压力Nominal Pressure: 0.1MPa
适用介质Suitable Medium:
空气、煤气和其他气体
Air, gas and other gases



升降比例阀 LIFT PROPORTIONAL VALVE

公称通径Nominal Diameter: 200-1250mm
适用温度Suitable temperature: $\leq 150^{\circ}\text{C}$
适用介质Suitable Medium:
颗粒粉尘、物质
Particles of dust, materials
驱动方式Driving mode:
电动推杆
Manual



密闭闸门 CLOSED GATE

公称通径Nominal Diameter: 200-800mm
适用温度Suitable temperature: $\leq 300^{\circ}\text{C}$
适用介质Suitable Medium:
固体粉质
Solid powder
驱动方式Driving mode:
手动
Manua



放风阀 LET IN FRESH AIR VALVE

公称通径Nominal Diameter: 150-600mm
适用温度Suitable temperature: $\leq 250^{\circ}\text{C}$
公称压力Nominal Pressure: 0.1MPa
适用介质Suitable Medium:
空气、尘气、煤气
Air, the dust gas ags



圆风门 AIR INLET ROUND

公称通径Nominal Diameter: 500-2400mm
公称压力Nominal Pressure: 0.1MPa
适用温度Suitable temperature: $\leq 120^{\circ}\text{C}$
适用介质Suitable Medium:
转炉煤气等
Converter gas, etc
启闭切换时间On-off swtch time: $\leq 15\text{秒}$



鄂式闸门 THE HUBEI TYPE GATE

公称通径Nominal Diameter: 300X300-800X800mm
适用温度Suitable temperature: $\leq 300^{\circ}\text{C}$
适用介质Suitable Medium:
干燥粉体
Dry powder
驱动方式Driving mode:
手动、电动、气动
Manual and electric pneumatic



齿条式冷风阀 RACK TYPE THE COLD WIND VALVE

公称通径Nominal Diameter: 300X300-800X800mm
适用温度Suitable temperature: $\leq 300^{\circ}\text{C}$
公称压力Nominal Pressure: 0.1MPa
适用介质Suitable Medium:
空气等气体
Gas, such as air
驱动方式Driving mode:
手动、电动、气动、液动
Manual and electric pneumatic, hydraulic



泄压阀 PRESSURE RELIEF VALVE

公称通径Nominal Diameter: 200-900mm
适用温度Suitable temperature: $\leq 200^{\circ}\text{C}$
公称压力Nominal Pressure: 0.1MPa
适用介质Suitable Medium:
压缩易爆气体
Compression and explosive gas



均压放散阀 BRINGING PRESSURE VALVE

公称通径Nominal Diameter: 200-300mm
公称压力Nominal Pressure: 0.15MPa
适用温度Suitable temperature: $\leq 2500^{\circ}\text{C}$
适用介质Suitable Medium:
半净空气
Half a clean air
驱动方式Driving mode:
液动
Hydraulic



放料阀系列

FEEDING VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

调节阀系列

REGULATOR VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



手动上展式放料阀
THE EXHIBITION MANUAL TYPE FEEDING VALVES

产品型号Product Model: HG5-81-1
公称通径Nominal Diameter: 50~400mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~650°C
适用介质Suitable Medium:
油品、酸类
Oil, acid



手动下展式放料阀
THE EXHIBITION MANUAL TYPE FEEDING VALVES

产品型号Product Model: HG5-81-2
公称通径Nominal Diameter: 50~400mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~650°C
适用介质Suitable Medium:
油品、酸类
Oil, acid



自力式压力调节阀
SELF-RELIANCE TYPE PRESSURE REGULATOR

产品型号Product Model: ZZYP
公称通径Nominal Diameter: 25~300mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
控制气体液体、蒸气
Control gas liquid steam



自力式电控制温度调节阀
SELF-RELIANCE TYPE ELECTRIC TEMPERATURE REGULATOR

产品型号Product Model: ZZWPE
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
蒸气、水、油、气体
Steam, water, oil and gas



管接放料阀
TUBE FEEDING VALVES BY

产品型号Product Model: FG45Y
公称通径Nominal Diameter: 50~550mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
油品、酸类、腐蚀性介质
Oil, acid corrosive medium



Y型料浆阀
Y PULP VALVES

产品型号Product Model: JS545Y
公称通径Nominal Diameter: 50~500mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
油品、酸类、腐蚀性介质
Oil, acid corrosive medium



电动单座调节阀
ELECTRIC SINGLE SEAT REGULATOR

产品型号Product Model: ZNZP/N
公称通径Nominal Diameter: 25~300mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~450°C
适用介质Suitable Medium:
控制气体液体、蒸气
Control gas liquid steam



自力式微压调节阀
SELF-RELIANCE DECLINED PRESSURE REGULATOR

产品型号Product Model: ZZV
公称通径Nominal Diameter: 20~300mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: ≤350°C
适用介质Suitable Medium:
气体、液体、蒸气
Gas, liquid and steam



电动Y型料浆阀系列
ELECTRIC Y PULP VALVE SERIES

产品型号Product Model: JS945Y
公称通径Nominal Diameter: 50~400mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
油品、酸类、腐蚀性介质
Oil, acid corrosive medium



气动平底放料阀
PNEUMATIC A FEEDING VALVES

产品型号Product Model: FB645Y
公称通径Nominal Diameter: 50~500mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
油品、酸类、腐蚀性介质
Oil, acid corrosive medium



指挥器压力调节阀
COMMAND PRESSURE REGULATOR

产品型号Product Model: ZVZP
公称通径Nominal Diameter: 25~100mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: ≤80°C
适用介质Suitable Medium:
控制气体液体、蒸气
Control gas liquid steam



电动防爆调节阀
ELECTRIC EXPLOSION-PROOF REGULATOR

产品型号Product Model: ZDLP
公称通径Nominal Diameter: 20~200mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -20°C~200°C
适用介质Suitable Medium:
蒸气、水、油、气体
Steam, water, oil and gas



气动带手动平底放料阀
PNEUMATIC WITH MANUAL A FEEDING VALVES

产品型号Product Model: FB6545Y
公称通径Nominal Diameter: 50~500mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
油品、酸类、腐蚀性介质
Oil, acid corrosive medium



角式放料阀
ANGLE TYPE FEEDING VALVE

产品型号Product Model: FB44Y
公称通径Nominal Diameter: 50~500mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
油品、酸类、腐蚀性介质
Oil, acid corrosive medium



自力式压力调节阀
TAKE THE HANDLE ALL THE REV. TYPE THE RELIEF VALVE SPRING

产品型号Product Model: V231D01
公称通径Nominal Diameter: 15~250mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -20°C~450°C
适用介质Suitable Medium:
控制气体液体、蒸气
Control gas liquid steam



电动智能型调节阀
ELECTRIC INTELLIGENT REGULATOR

产品型号Product Model: Z968Y
公称通径Nominal Diameter: 20~300mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -25°C~70°C
适用介质Suitable Medium:
气体、液体
Gases, liquid

调节阀系列

REGULATOR VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



电动调节阀
FLANGE GATE VALVE

产品型号Product Model: ZDLM
公称通径Nominal Diameter: 20~300mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~450°C
适用介质Suitable Medium:
气体、液体
Gas, liquid



电动调节阀
ELECTRIC REGULATOR

产品型号Product Model: T961Y
公称通径Nominal Diameter: 20~30mm
公称压力Nominal Pressure: 2.5~3.2MPa
适用温度Suitable temperature: -29°C~450°C
适用介质Suitable Medium:
锅炉给水
Boiler water supply



电动套筒调节阀
ELECTRIC SOCKET REGULATOR

产品型号Product Model: ZAZM
公称通径Nominal Diameter: 25~300mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~450°C
适用介质Suitable Medium:
液体、气体
Liquid, gas



平衡式电动调节阀
BALANCED ELECTRIC REGULATOR

产品型号Product Model: DWPD
公称通径Nominal Diameter: 1.6~2.5MPa
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气
Water, steam



电动三通调节阀
ELECTRIC 3-WAY REGULATING VALVE

产品型号Product Model: ZDLX/ZDLQ
公称通径Nominal Diameter: 25~300mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -40°C~450°C
适用介质Suitable Medium:
气体、液体
Gas, liquid



调节阀
REGULATOR

产品型号Product Model: HBCV3000
公称通径Nominal Diameter: 40~200mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
气体、液体
Gas, liquid



电动高压阀
ELECTRIC HIGH-PRESSURE VALVES

产品型号Product Model: T969Y
公称通径Nominal Diameter: 20~50mm
公称压力Nominal Pressure: 2.5~3.2MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气
Water, steam



气动薄膜切断阀
PNEUMATIC CUT-OFF VALVE

产品型号Product Model: ZMQP
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、气体、蒸气
Water, steam, gas



气动三通调节阀
PNEUMATIC 3-WAY REGULATING VALVE

产品型号Product Model: ZMAX/ZMAQ
公称通径Nominal Diameter: 25~300mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -40°C~315°C
适用介质Suitable Medium:
气体、液体
Gas, liquid



气动角型调节阀
PNEUMATIC ANGLE TYPE REGULATOR

产品型号Product Model: HAV
公称通径Nominal Diameter: 20~200mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
气体、液体
Gas, liquid



单座调节阀
SINGLE SEAT REGULATOR

产品型号Product Model: ZXP
公称通径Nominal Diameter: 20~200mm
公称压力Nominal Pressure: 1.6~10.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
液体、气体、蒸气
Liquids, gases vapors



带手轮单座调节阀
TAKE THE HANDWHEEL SINGLE SEAT REGULATOR

产品型号Product Model: ZXP
公称通径Nominal Diameter: 20~200mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -20°C~450°C
适用介质Suitable Medium:
液体、气体、蒸气
Liquids, gases vapors



低噪音笼式调节阀
LOW NOISE CAGE TYPE REGULATOR

产品型号Product Model: HCN
公称通径Nominal Diameter: 20~300mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
气体、液体
Gas, liquid



气动衬氟调节阀
PNEUMATIC FLUORINE REGULATOR

产品型号Product Model: ZMAPF46
公称通径Nominal Diameter: 20~150mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
气体、液体
Gas, liquid



双座调节阀
TWO-SEATER REGULATOR

产品型号Product Model: ZXN
公称通径Nominal Diameter: 25~200mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -20°C~425°C
适用介质Suitable Medium:
液体、气体、蒸气
Liquids, gases vapors



切断阀
CUT-OFF VALVE

产品型号Product Model: ZSQP-II
公称通径Nominal Diameter: 20~100mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -25°C~425°C
适用介质Suitable Medium:
液体、气体、蒸气
Liquids, gases vapors

衬氟阀门系列

FLUORING-BUTTERFLY VALVES SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

衬氟阀门系列

FLUORING-BUTTERFLY VALVES SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



衬氟闸阀 FLUORINE GATE VALVES

产品型号Product Model: Z41F46、F4
公称通径Nominal Diameter: 15~250mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



衬氟截止阀 FLUORINE GLOBE VALVE

产品型号Product Model: J41F4、F46
公称通径Nominal Diameter: 15~250mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
除熔融碱金属、三氧化氯等
In addition to melt oxidation chlorine alkali metal, three



衬氟法兰蝶阀(中线) FLUORINE FLANGED BUTTERFLY (CENTRAL LINE)

产品型号Product Model: D341F4、F46
公称通径Nominal Diameter: 40~500mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
硫酸、氢氟酸、硝酸、氯气、苯、强碱、王水、强氧化剂等
Fluoride acid nitric acid of sulfuric acid chlorine
benzene alkali aqua regia strong anti-oxidant, etc



衬氟对夹式蝶阀 FLUORINE WAFER BUTTERFLY VALVE

产品型号Product Model: D341F4、F46
公称通径Nominal Diameter: 50~400mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
硫酸、氢氟酸、硝酸、氯气、苯、强碱、王水、强氧化剂等
Water,oil,steam,acid medium elc



电动衬氟截止阀 ELECTRIC FLUORINE GLOBE VALVE

产品型号Product Model: J941F4、F46
公称通径Nominal Diameter: 15~250mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
酸、碱、强氧化剂等
Acid, alkali, strong oxidizer, etc



衬氟球阀 FLUORINE BALL VALVE

产品型号Product Model: Q341F4、F46Q41F4、F46
公称通径Nominal Diameter: 15~250mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



衬氟过滤器 FLUORINE FILTER

产品型号Product Model: Y式、篮式
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



衬氟视镜 FLUORINE AS A MIRROR

产品型号Product Model: HGS07F4、F46
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



衬氟球阀放料阀 FLUORINE BALL PUT MATERIAL VALVE

产品型号Product Model: FQ41F4、F46
公称通径Nominal Diameter: 25~200mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



衬氟隔膜阀 FLUORINE DIAPHRAGM VALVE

产品型号Product Model: G41F4、F46
公称通径Nominal Diameter: 15~250mm
公称压力Nominal Pressure: 0.6~1.6MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



衬氟调节阀 FLUORINE REGULATOR

产品型号Product Model: ZH4F46-F4
公称通径Nominal Diameter: 20~200mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



衬氟管件 FLUORINE FITTING

公称通径Nominal Diameter: 32×25-80×40mm
80×50-150×100mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -20°C~150°C
适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



衬氟止回阀 FLUORINE CHECK VALVE

产品型号Product Model: H41F4、F46
公称通径Nominal Diameter: 20~200mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
氨氟酸、发烟硫酸、硝酸、三水氯气、沸腾的苛性钠溶液、酮类等
Ammonia fluoride acid fuming sulfuric acid nitric acid sanshui
oxygen caustic soda capacity of the boiling liquid ketone, etc



对夹连接蝶阀 LINK TO CLIP BUTTERFLY VALVE

产品型号Product Model: D71F4、F46
公称通径Nominal Diameter: 40~800mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



衬氟弯头 FLUORINE ELBOW

产品型号Product Model: WT
公称通径Nominal Diameter: 50~200mm
公称压力Nominal Pressure: -0.07~2.5MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
酸、碱、强氧化剂等
Acid, alkali, strong oxidizer, etc



衬氟补偿器 FLUORINE COMPENSATOR

公称通径Nominal Diameter: 40~600mm
公称压力Nominal Pressure: 0.40~0.09
0.15~0.09MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc

衬氟阀门系列

FLUORING-BUTTERFLY VALVES SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



衬胶隔膜阀 LINING RUBBER DIAPHRAGM VALVE

产品型号Product Model: G41J
公称通径Nominal Diameter: 15~400mm
公称压力Nominal Pressure: 0.6~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
非腐蚀性或一般腐蚀性介质
The corrosive or general corrosiveMedium



英标隔膜阀 BRITISH STANDARD DIAPHRAGM VALVE

产品型号Product Model: EG41J
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 0.6~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
非腐蚀性或一般腐蚀性介质
The corrosive or general corrosiveMedium



三通隔膜阀 TEE DIAPHRAGM VALVE

产品型号Product Model: G49J
公称通径Nominal Diameter: 20~300mm
公称压力Nominal Pressure: 0.6~1.0MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
非腐蚀性或一般腐蚀性介质
The corrosive or general corrosiveMedium



衬胶截止阀 RUBBER LINING GLOBE VALVE

产品型号Product Model: J41J
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 0.6~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
非腐蚀性或一般腐蚀性介质
The corrosive or general corrosiveMedium



直流式衬胶截止阀 STRAIGHT STREAMING RUBBER LINING GLOBE VALVE

产品型号Product Model: J45J
公称通径Nominal Diameter: 25~2500mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
非腐蚀性或一般腐蚀性介质
The corrosive or general corrosiveMedium



旋启式衬胶止回阀 SWING LINE WITH RUBBER CHECK VALVE

产品型号Product Model: H44J
公称通径Nominal Diameter: 25~400mm
公称压力Nominal Pressure: 0.6~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
非腐蚀性或一般腐蚀性介质
The corrosive or general corrosiveMedium



浮球式衬胶止回阀 FLOAT TYPE LINE WITH RUBBER CHECK VALVE

产品型号Product Model: H40J
公称通径Nominal Diameter: 15~500mm
公称压力Nominal Pressure: 0.6~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
非腐蚀性或一般腐蚀性介质
The corrosive or general corrosiveMedium



气动衬胶截止阀 PNEUMATIC RUBBER LINING GLOBE VALVE

产品型号Product Model: J6B41J (F46)
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 0.6~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
非腐蚀性或一般腐蚀性介质
The corrosive or general corrosiveMedium

丝扣阀门系列

THREAD IS VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



美标内螺纹闸阀 AMERICAN STANDARD THREADED GATE VALVES

产品型号Product Model: Z11W
公称通径Nominal Diameter: 1/2"~2"
公称压力Nominal Pressure: 150~600Lb
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品、腐蚀性介质
Water, steam, oil products, other corrosive medium



二片式球阀 TWO CHIP BALL VALVE

产品型号Product Model: Q11F
公称通径Nominal Diameter: 1/4"~2"
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water,oil, gas and some corrosive liquid



美标内螺纹截止阀 AMERICAN STANDARD THREADED GLOBE VALVE

产品型号Product Model: J11W
公称通径Nominal Diameter: 1/2"~2"
公称压力Nominal Pressure: 150~600Lb
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品、腐蚀性介质
Water, steam, oil products, other corrosive medium



三片式球阀 3 CHIP BALL VALVE

产品型号Product Model: Q11F
公称通径Nominal Diameter: 1/4"~2"
公称压力Nominal Pressure: 1.6~6.1MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water,oil, gas and some corrosive liquid



不锈钢内螺纹截止阀 STAINLESS STEEL THREADED GLOBE VALVE

产品型号Product Model: J11W
公称通径Nominal Diameter: 15~65mm
公称压力Nominal Pressure: 1.6~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品、腐蚀性介质
Water, steam, oil products, other corrosive medium



内螺纹三通球阀 THREADED TEE BALL VALVE

产品型号Product Model: Q14F
公称通径Nominal Diameter: 1/4"~2"
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water,oil, gas and some corrosive liquid



一片式球阀 A CHIP BLAA VALVE

产品型号Product Model: Q11F
公称通径Nominal Diameter: 1/4"~2"
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water,oil, gas and some corrosive liquid



不锈钢广式内螺纹球阀 STAINLESS STEEL WIDE TYPE THREADED BALL VALVE

产品型号Product Model: Q21F
公称通径Nominal Diameter: 6~50mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water,oil, gas and some corrosive liquid

丝扣阀门系列

THREAD IS VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

黄铜阀门系列

BRASS VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



Y型过滤器 Y FILTER



产品型号Product Model: SY11C
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品、腐蚀性介质
Water, steam, oil products, other corrosive medium



气动3P式内螺纹球阀 PNEUMATIC 3 P TYPE THREADED BALL VALVE

产品型号Product Model: Q11F/Y
公称通径Nominal Diameter: 1/4"~4"
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water, oil, gas and some corrosive liquid



黄铜法兰球阀 BRASS FLANGED BALL VALVES

产品型号Product Model: Q41F
公称通径Nominal Diameter: 25~100mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、非腐蚀性液体
water, the corrosive liquid



黄铜丝扣球阀 YELLOW COPPER WIRE BUCKLE BALL VALVE

产品型号Product Model: Q11F
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、非腐蚀性液体
water, the corrosive liquid



不锈钢内螺纹止回阀 STAINLESS STEEL THREADED CHECK VALVE

产品型号Product Model: H11W
公称通径Nominal Diameter: 15~65mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil products



不锈钢小口径止回阀 STAINLESS STEEL SMALL-BORE CHECK VALVE

产品型号Product Model: H14W
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品、腐蚀性介质
Water, steam, oil products, other corrosive medium



黄铜闸阀 BRASS GATE VALVES

产品型号Product Model: Z15W
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -46°C~200°C
适用介质Suitable Medium:
水、非腐蚀性液体、饱和蒸气
The corrosive liquid water, and saturated steam



黄铜截止阀 BRASS GLOBE VALVE

产品型号Product Model: J11W
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -46°C~200°C
适用介质Suitable Medium:
水、非腐蚀性液体、饱和蒸气
The corrosive liquid water, and saturated steam



二片式弹簧立式止回阀 TWO CHIP VERTICAL CHECK VALVE SPRING

产品型号Product Model: H12W
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
般腐蚀性物质、药液、饮质
General corrosive medium, the solution, drinks



气动二片式内螺纹球阀 TWO CHIP VERTICAL CHECK VALVE SPRING

产品型号Product Model: Q611F/Y
公称通径Nominal Diameter: 6~100mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil products



排气阀 EXHAUST VALVE

产品型号Product Model: B725X
公称通径Nominal Diameter: 15~25mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -46°C~80°C
适用介质Suitable Medium:
水、空气
water, air



黄铜卧式止回阀 BRASS HORIZONTAL CHECK VALVE

产品型号Product Model: H14W
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -46°C~200°C
适用介质Suitable Medium:
水、非腐蚀性液体、饱和蒸气
The corrosive liquid water, and saturated steam



气动三通内螺纹球阀 PNEUMATIC TEE LEI LINES IN BALL VALVES

产品型号Product Model: Q61F
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、蒸气、油品、燃气
Water, steam, oil and gas



气动角座阀 PNEUMATIC ANGLE VALVE SEAT

产品型号Product Model: J611F
公称通径Nominal Diameter: 10~60mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、液体、水蒸气
water, liquid, and water vapor



黄铜立式止回阀 BRASS VERTICAL CHECK VALVE

产品型号Product Model: H12X
公称通径Nominal Diameter: 15~65mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -46°C~200°C
适用介质Suitable Medium:
水、油
water, oil



黄铜过滤器 BRASS FILTER

产品型号Product Model: LV11
公称通径Nominal Diameter: 15~65mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -46°C~200°C
适用介质Suitable Medium:
水
Water

黄铜阀门系列

BRASS VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



黄铜PP-R球阀 BRASS PP-R BALL VALVE

公称通径Nominal Diameter: 20~75mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气
Water,oil,gas



黄铜三通球阀 (T型) BRASS TEE BALL VALVE(D)

产品型号Product Model: Q14F
公称通径Nominal Diameter: 15~25mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气
Water,oil,gas



锁闭阀 LOCK VALVE

公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
空气
air



温控阀 THERMOSTATIC VALVE

公称通径Nominal Diameter: 15~25mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -29°C~100°C
适用介质Suitable Medium:
水、空气
water,air

旋塞阀系列

PLUG VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



提升式硬密封旋塞阀 LIFT HARD SEALING PLUG VALVES

产品型号Product Model: X42W、X43H、X43Y
公称通径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 150~1500Lb
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil products



卡套式软密封旋塞阀 CARD SET OF TYPE SOFT SEALING PLUG VALVES

产品型号Product Model: X43F、X343F
公称通径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 150~900Lb
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品
Water,oil



压力平衡式到装油密封旋塞阀 PRESSURE BALANCE TYPE TO THE LOADING OF OIL SEALING PLUG VALVES

产品型号Product Model: X47F、X47X
公称通径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 150~900Lb
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品
Water,oil



二通内螺全铜旋塞阀 2 THE LINKS WITHIN THE SCREW ALL THE COPPER PLUG VALVES

产品型号Product Model: X13W
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: -46°C~200°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil products



黄铜法兰闸阀 BRASS FLANGE GATE VALVES

产品型号Product Model: Z45W
公称通径Nominal Diameter: 25~100mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -46°C~200°C
适用介质Suitable Medium:
水、非腐蚀性液体
water, the corrosive liquid



黄铜法兰截止阀 BRASS FLANGE GLOBE VALVE

产品型号Product Model: J41W
公称通径Nominal Diameter: 80~150mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -46°C~200°C
适用介质Suitable Medium:
水、非腐蚀性液体
water, the corrosive liquid



二通保温旋塞阀 2 THE HEAT PRESERVATION PLUG VALVES

产品型号Product Model: BX43W
公称通径Nominal Diameter: 20~300mm
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
硝酸类
Nitric acid kind of



二通全铜旋塞阀 2 ALL THE COPPER PLUG VALVES

产品型号Product Model: X43W
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: -46°C~200°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil products



黄铜Y型过滤器 BRASS Y FILTER

产品型号Product Model: GL41W
公称通径Nominal Diameter: 32~200mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -46°C~200°C
适用介质Suitable Medium:
水、非腐蚀性液体
water, the corrosive liquid



黄铜法兰止回阀 BRASS FLANGE CHECK VALVE

产品型号Product Model: H44W
公称通径Nominal Diameter: 125~150mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -46°C~200°C
适用介质Suitable Medium:
水
Water



二通内螺不锈钢旋塞阀 2 THE LINKS WITHIN THE SCREW STAINLESS STEEL PLUG VALVES

产品型号Product Model: H13W
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
硝酸、醋酸
Nitric acid, acetic acid



三通铜芯旋塞阀 TEE TONGXIN PLUG VALVES

产品型号Product Model: X44T
公称通径Nominal Diameter: 25~300mm
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: -46°C~200°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil products

旋塞阀、真空阀系列

PLUG VALVE, VACUUM VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

给排水阀门系列

WATER SUPPLY AND DISCHARGE VALVE SERIES



三通内螺全铜旋塞阀 IN ALL THREE SCREW COPPER PLUG VALVES

产品型号Product Model: X16W
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 0.6~1.6MPa
适用温度Suitable temperature: -46°C~200°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil products



二通铸铁旋塞阀 2 THE CAST IRON PLUG VALVES

产品型号Product Model: X43W
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 0.6MPa
适用温度Suitable temperature: -10°C~200°C
适用介质Suitable Medium:
煤气、油品
Gas, oil



遥控浮球阀 REMOTE CONTROL BALL FLOAT VALVE

产品型号Product Model: 100X
公称通径Nominal Diameter: 20~800mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
Water



减压阀 PRESSURE REDUCING VALVE

产品型号Product Model: 200X
公称通径Nominal Diameter: 20~800mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
Water



三通不锈钢旋塞阀 TEE STAINLESS STEEL PLUG VALVES

产品型号Product Model: X44W
公称通径Nominal Diameter: 25~300mm
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
煤气、油品
Gas, oil



二通不锈钢旋塞阀 2 THE STAINLESS STEEL PLUG VALVES

产品型号Product Model: X43W
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
硝酸类
Nitric acid kind of



缓闭式止回阀 FLANGE GATE VALVE

产品型号Product Model: 300X
公称通径Nominal Diameter: 20~800mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
Water



流量控制阀 FLOW CONTROL VALVES

产品型号Product Model: 400X
公称通径Nominal Diameter: 20~800mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
Water



手动真空蝶阀 MANUAL VACUUM BUTTERFLY VALVE

公称通径Nominal Diameter: 32~400mm
适用温度Suitable temperature: -29°C~150°C
阀门漏率Gas leakage rate: $\leq 1.3 \times 10^{-5}$ Pa.L/S (正反向)
适用范围Scope of application: 105~67 $\times 10^{-5}$ Pa
主体材质The main materials:
铸钢、不锈钢
Cast steel, stainless steel



电动真空蝶阀 BRASS FLANGE GLOBE VALVE

公称通径Nominal Diameter: 50~400mm
适用温度Suitable temperature: -29°C~150°C
阀门漏率Gas leakage rate: $\leq 1.3 \times 10^{-5}$
适用范围Scope of application: 快卸法兰(KF) 2 $\times 105-13 \times 10^{-5}$
适用范围Scope of application: 活套法兰(KF) 16 $\times 105-13 \times 10^{-5}$
主体材质The main materials:
不锈钢
stainless steel



泄压/持压阀 PRESSURE RELIEF VALVES/THE

产品型号Product Model: 500X
公称通径Nominal Diameter: 20~800mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水
Water



电动控制阀 ELECTRIC CONTROL VALVES

产品型号Product Model: 600X
公称通径Nominal Diameter: 20~800mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
Water



气动真空蝶阀 PNEUMATIC VACUUM BUTTERFLY VALVE

公称通径Nominal Diameter: 50~600mm
适用温度Suitable temperature: -29°C~150°C
阀门漏率Gas leakage rate: $\leq 1.3 \times 10^{-6}$
适用范围Scope of application: 2 $\times 105-1.3 \times 10^{-5}$
主体材质The main materials:
不锈钢
stainless steel



高真空(压力)球阀 HIGH VACUUM(PRESSURE) BALL VALVE

公称通径Nominal Diameter: 16~150mm
适用温度Suitable temperature: -29°C~150°C
阀门漏率Gas leakage rate: $\leq 1.3 \times 10^{-6}$
适用范围Scope of application: 快卸法兰(KF) 2 $\times 105-13 \times 10^{-5}$
适用范围Scope of application: 活套法兰(KF) 16 $\times 105-13 \times 10^{-5}$
主体材质The main materials:
不锈钢
stainless steel



水泵控制阀 PUMP CONTROL VALVES

产品型号Product Model: 700X
公称通径Nominal Diameter: 20~800mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
Water



压差旁通平衡阀 DIFFERENTIAL PRESSURE BYPASS BALANCING VALVE

产品型号Product Model: 800X
公称通径Nominal Diameter: 20~800mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
Water

给排水阀门系列

WATER SUPPLY AND DISCHARGE VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



法兰闸阀
FLANGE GATE VALVE

产品型号Product Model: 900X
公称通径Nominal Diameter: 20~800mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
Water



多功能水泵控制阀
MULTIFUNCTIONAL WATER PUMP
CONTROL VALVE

产品型号Product Model: JD745X
公称通径Nominal Diameter: 40~1200mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0~80°C
适用介质Suitable Medium:
水
Water,



可调式减压稳压阀
BUT COMMISSIONING REDUCED
PRESSURE INSIDE THE VALVE

产品型号Product Model: YX741X
公称通径Nominal Diameter: 40~1200mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
Water



隔膜式排泥阀
DIAPHRAGM TYPE ROW MUD VALVE

产品型号Product Model: J744X
公称通径Nominal Diameter: 100~400mm
公称压力Nominal Pressure: 0.6~1.0MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水、污水
Water, sewage



防污隔断阀
ANTI-POLLUTION ISOLATING VALVE

产品型号Product Model: HS4IX
公称通径Nominal Diameter: 50~600mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
Water



消声止回阀
SILENCING CHECK VALVE

产品型号Product Model: H41X
公称通径Nominal Diameter: 40~600mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
Water



静音式止回阀
MUTE TYPE CHECK VALVE

产品型号Product Model: DRVZ
公称通径Nominal Diameter: 32~350mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
Water



橡胶瓣止回阀
RUBBER DISC CHECK VALVES

产品型号Product Model: SFVC
公称通径Nominal Diameter: 50~700mm
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水、污水
Water, sewage



活塞式减压阀
PISTON PRESSURE REDUCING VALVE

产品型号Product Model: BFH104X、AX741X
公称通径Nominal Diameter: 50~1200mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
Water



电动遥控阀
ELECTRIC REMOTE CONTROL VALVE

产品型号Product Model: J145X
公称通径Nominal Diameter: 50~1200mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水、油品
Water, oil



消声缓闭止回阀
SILENCING SLOWLY-CLOSING CHECK VALVE

产品型号Product Model: HH49X
公称通径Nominal Diameter: 40~1200mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水、污水
water, sewage



多功能控制阀三合一止回阀
MULTI-FUNCTION CONTROL VALVES
TRIPLE CHECK VALVE

产品型号Product Model: HH49X
公称通径Nominal Diameter: 40~1200mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水、污水
Water, sewage



微阻缓闭止回阀
THE RESISTANCE SLOWLY-CLOSING
CHECK VALVE

产品型号Product Model: HH44X
公称通径Nominal Diameter: 50~700mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水、污水
Water, sewage



倒流防止器
BACKFLOW PREVENTER

产品型号Product Model: HS41X
公称通径Nominal Diameter: 40~300mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水及物理、化学性质类似于水
Water and physical and che-mical properties similar to the water



数字锁定平衡阀
DIGITAL LOCK BALANCING VALVE

产品型号Product Model: SP45F
公称通径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水
Water



自力式平衡阀
SELF-RELIANCE TYPE BALANCING VALVE

产品型号Product Model: ZLF
公称通径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水
Water

给排水阀门系列

WATER SUPPLY AND DISCHARGE VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

针型阀系列

NEEDLE VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



自力式压差控制阀
SELF-RELIANCE TYPE DIFFERENTIAL
PRESSURE CONTROL VALVES

产品型号Product Model: ZYC
公称通径Nominal Diameter: 15~600mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: 0°C~100°C
适用介质Suitable Medium:
水
Water



自力式平衡阀
SELF-RELIANCE TYPE BALANCING VALVE

产品型号Product Model: ZL47F
公称通径Nominal Diameter: 32~350mm
公称压力Nominal Pressure: 0.6~1.0MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
Water



内螺纹针式截止阀
THREADED THE NEEDLE TYPE GLOBE VALVE

产品型号Product Model: J13W/H
公称通径Nominal Diameter: 6~50mm
公称压力Nominal Pressure: 2.5~32MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、蒸汽、气体等
water, steam, gas etc



外螺纹角式针型阀
THE MALE ANGLE TYPE NEEDLE VALVE TYPE

产品型号Product Model: J24W
公称通径Nominal Diameter: 3~6mm
公称压力Nominal Pressure: 16.0~32.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
液化石油气、水、酸、蒸汽、油品等
Liquefied petroleum gas, water, steam, oil, acid, etc



明杆弹性座封闸阀
RISING STEM SEAL GATE VALVES ELATIC BASE

产品型号Product Model: RRHX
公称通径Nominal Diameter: 50~1000mm
公称压力Nominal Pressure: 0.6~1.6MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水、污水
water, sewage



消防软密封闸阀
FIRE SOFT GATE VALVES

产品型号Product Model: RRHS
公称通径Nominal Diameter: 50~1000mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
Water



压力表针型阀
ANLAOGUE DISPLAY PRESSURE TYPE VALVE

产品型号Product Model: J19H
公称通径Nominal Diameter: 6~15mm
公称压力Nominal Pressure: 1.6~32.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
液化石油气、酸、蒸汽、油
Liquefied petroleum gas, steam, acid, oil



法兰角式截止阀
FLANGE ANGLE GLOBE VALVE

产品型号Product Model: J44W
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 16.0~4.0MPa
适用温度Suitable temperature: ≤200°C≤425°C
适用介质Suitable Medium:
液化石油气、水、酸、蒸汽、油品等
Liquefied petroleum gas, water, steam, oil, acid, etc



暗杆弹性座封闸阀
DARK STEM SEAL GATE VALVES ELASTIC BASE

产品型号Product Model: RVHX
公称通径Nominal Diameter: 50~1000mm
公称压力Nominal Pressure: 0.6~1.6MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水、污水
water, sewage



橡胶接头
RUBBER JOINT

产品型号Product Model: JGD
公称通径Nominal Diameter: 40~600mm
公称压力Nominal Pressure: 1.5~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水、空气、油
Water, Air and oil



活接头针式截止阀
LIVE JOINT NEEDLE TYPE GLOBE VALVE

产品型号Product Model: J21W/H
公称通径Nominal Diameter: 6~25mm
公称压力Nominal Pressure: 2.5~32MPa
适用温度Suitable temperature: -29°C~550°C
适用介质Suitable Medium:
水、蒸汽、气体等
water, steam, gas, etc



对焊针型阀
BUTT WELD NEEDLE VALVE TYPE

产品型号Product Model: J61Y
公称通径Nominal Diameter: 6~25mm
公称压力Nominal Pressure: 16.0~32.0MPa
适用温度Suitable temperature: -29°C~550°C
适用介质Suitable Medium:
液化石油气、水、酸、蒸汽、油品等
Liquefied petroleum gas, water, steam, oil, acid, etc



伸缩器
SCALING WARE

产品型号Product Model: VSSJA
公称通径Nominal Diameter: 40~2000mm
公称压力Nominal Pressure: 0.6~1.6MPa
适用温度Suitable temperature: ≤80°C
适用介质Suitable Medium:
水
Water



不锈钢金属补偿器
STAINLESS STEEL METAL COMPENSATOR

产品型号Product Model: ZYC
公称通径Nominal Diameter: 25~500mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水、蒸汽、油
Water, steam, oil



锻港外螺纹截止阀
FORGING STEEL OUTER THREAD GLOBE VALVE

产品型号Product Model: J21W/H
公称通径Nominal Diameter: 10~50mm
公称压力Nominal Pressure: 1.6~16MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽
water, oil, steam



针型仪表阀
NEEDLE VALVE TYPE INSTRUMENT

产品型号Product Model: JJM1(M8)
公称通径Nominal Diameter: 5~20mm
公称压力Nominal Pressure: 2.5~32MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸汽、气体等
water, steam, gas, ect

针型阀系列

NEEDLE VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



平衡针型阀
PINGHENGZHEN TYPE VALVE

产品型号Product Model: QFF3
公称通径Nominal Diameter: 5mm
公称压力Nominal Pressure: 1.6~32.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
液化石油气、酸、蒸气、油
Liquefied petroleum gas, acid, steam, oil



雌雄截止阀
MALE AND FEMALE GLOBE VALVE

产品型号Product Model: J21_H
公称通径Nominal Diameter: 5~20mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: ≤200°C~425°C
适用介质Suitable Medium:
化石油气、水、酸、蒸气、油品等
Liquefied petroleum gas, water, steam, oil, acid, ect



液位计阀
LEVEL GAUGE VALVE

产品型号Product Model: JX29W/H
公称通径Nominal Diameter: 6mm
公称压力Nominal Pressure: 1.6~32.0MPa
适用温度Suitable temperature: ≤180°C
适用介质Suitable Medium:
水、蒸气
Water, steam



取压截止阀
TAKE PRESSURE GLOBE VALVE

产品型号Product Model: JJBY1
公称通径Nominal Diameter: 5mm
公称压力Nominal Pressure: 1.6~32.0MPa
适用温度Suitable temperature: ≤180°C
适用介质Suitable Medium:
水、蒸气
Water, steam



法兰截止阀
FLANGE GLOBE VALVE

产品型号Product Model: J41_W
公称通径Nominal Diameter: 10~15mm
公称压力Nominal Pressure: 1.6~32.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、蒸气
Water, steam



卡套式球阀
CARD SET OF TYPE BALL VALVE

产品型号Product Model: QGY1
公称通径Nominal Diameter: 10mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -20°C~350°C
适用介质Suitable Medium:
气体、水、油品、酸性液体
Gas, water, oil acid liquid



取压球阀
TAKE PRESSURE BALL VALVE

产品型号Product Model: QGAY1
公称通径Nominal Diameter: 10mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气
Water, oil, gas, etc



气源球阀
AIR BALL VALVE

产品型号Product Model: QGAY1
公称通径Nominal Diameter: 5~50mm
公称压力Nominal Pressure: 2.5~16.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气等
Water, oil, gas, etc

疏水阀系列

STEAM TRAP VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



自由浮球式疏水阀
FREE FLOAT STEAM TRAP

产品型号Product Model: CS41H
公称通径Nominal Diameter: 15~150mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~380°C
适用介质Suitable Medium:
水、蒸气等
Water, steam, etc



倒置桶式蒸气疏水阀
TURN DOWN THE BARREL TYPE STEAM TRAP

产品型号Product Model: L881F-L886F
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
蒸气
steam



可调双金属片式疏水阀
ADJUSTABLE BIMETAL STEAM TRAP

产品型号Product Model: LTB11FLTB6F(CS47H)
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~200°C
适用介质Suitable Medium:
蒸汽管道、冷凝器
Steam pipe, condenser



波纹管式疏水阀
BELLOWS TYPE STEAM TRAP

产品型号Product Model: CS14FH/W
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
蒸气
steam



热动力（圆盘）式疏水阀
THERMODYNAMIC (DISC) TYPE STEAM TRAP

产品型号Product Model: CS49H
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~350°C
适用介质Suitable Medium:
蒸气
steam



膜盒式疏水阀
FILM CASSETTE STEAM TRAP

产品型号Product Model: CS46H
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
供热气主管线、伴热管线、干燥器、工业加热
Heating, steam competentline, dryer, industrial heat



自由半浮球式蒸气疏水阀
FREE HALF FLOAT TYPE STEAM TRAP

产品型号Product Model: CS15H
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
蒸气、化工、炼油、电力、轻纺、造纸等
Steam, chemical, oilrefining, electric power, textile, paper, etc



可调恒温式疏水阀
ADJUSTABLE THERMOSTATIC STEAM TRAP

产品型号Product Model: STC
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
蒸气
steam

疏水阀系列

STEAM TRAP VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

疏水阀系列

STEAM TRAP VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



钟型浮子(倒吊桶)式疏水阀 BELL FLOAT (POURED BUCKETS) TYPE STEAM TRAP

产品型号Product Model: CS45H
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
蒸气
steam



钟型浮子(倒吊桶)式疏水阀 BELL FLOAT (POURED BUCKETS) TYPE STEAM TRAP

产品型号Product Model: CS45H
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~380°C
适用介质Suitable Medium:
蒸气主管、分汽缸、热交换器、硫化机
Steam director, points cylinders, heat exchanger



自由浮球式疏水阀 FREE FLOAT TYPE STEAM TRAP

产品型号Product Model: CS11H
公称通径Nominal Diameter: 15~150mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~380°C
适用介质Suitable Medium:
水、蒸气等
Water, steam, etc



可调双金属片式疏水阀 ADJUSTABLE BIMETAL STRIP TYPE STEAM TRAP

产品型号Product Model: LT86LTB11(CS17H)
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~200°C
适用介质Suitable Medium:
蒸气管道、冷凝器
Steam pipe, condenser



高温高压圆盘式疏水阀 DISC TYPE HIGH TEMPERATURE AND HIGH PRESSURE STEAM TRAP

产品型号Product Model: HRF150
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~16MPa
适用温度Suitable temperature: -29°C~500°C
适用介质Suitable Medium:
蒸气
steam



双金属片式疏水阀 BIMETAL STRIP TYPE STEAM TRAP

产品型号Product Model: BK型 (CS47H)
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~200°C
适用介质Suitable Medium:
蒸气、凝结水
steam and condensate



波纹管式疏水阀 BELLOW TYPE STEAM TRAP

产品型号Product Model: CS14F
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~350°C
适用介质Suitable Medium:
蒸气
Steam



热动力(圆盘)式疏水阀 DIRECT BASKET FILTER

产品型号Product Model: CS19H
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~350°C
适用介质Suitable Medium:
蒸气
steam



杠杆浮球式疏水阀 LEVER BALL FLOAT TYPE STEAM TRAP

产品型号Product Model: FT44H
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
凝结水
condensate



杠杆浮球式疏水阀 LEVER BALL FLOAT TYPE STEAM TRAP

产品型号Product Model: GS41
公称通径Nominal Diameter: 25~100mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
石油、化工、食品、造纸 冶金等
Petroleum, chemical industry, food, paper making
matallurgy, etc



膜盒式疏水阀 SYLPHON TYPE STEAM TRAP

产品型号Product Model: CS16H
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
供热气主管线、伴热管线、干燥器、工业 加热
Heating, steam, competent line,
heating pipes, Dryer, Industrial heat



可调恒温式疏水阀 ADJUSTABLE CONSTANT TEMPERATURE TYPE STEAM TRAP

产品型号Product Model: STB
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: ≤220°C
适用介质Suitable Medium:
蒸气
steam



汽水分离器 WATER SEPARATOR

产品型号Product Model: UFS
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 0.01~2.5MPa
适用温度Suitable temperature: -29°C~200°C
适用介质Suitable Medium:
蒸气
steam



汽水分离器 WATER SEPARATOR

产品型号Product Model: AS型
公称通径Nominal Diameter: 15~450mm
公称压力Nominal Pressure: 1.6~3.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
蒸气
steam



钟型浮子(倒吊桶)式疏水阀 BELL SHAPE FLOAT (INVETED BUCKET) STEAM TRAP

产品型号Product Model: ES8N(CS15H)
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
蒸气主管、分汽缸、热交换器、硫化机
Steam director, points cylinders, heat exchanger



双金属片式疏水阀 BIMETAL STRIP TYPE STEAM TRAP

产品型号Product Model: BK型(CS17H)
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~220°C
适用介质Suitable Medium:
水、蒸气等
Water, steam, etc

减压阀系列

PRESSURE REDUCING VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

过滤阀系列

FILTER VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



直接作用弹簧薄膜式减压阀 DIRECT ACTION FILM TYPE PRESSURE REDUCING VALVE SPRING

产品型号Product Model: Y42X
公称通径Nominal Diameter: 15~500mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水、非腐蚀性液体
water, the corrosive liquid



蒸气减压阀 STEAM PRESSURE REDUCING VALVE

产品型号Product Model: Y43H
公称通径Nominal Diameter: 15~400mm
公称压力Nominal Pressure: 1.0~10MPa
适用温度Suitable temperature: ≤350°C
适用介质Suitable Medium:
蒸气
Steam



Y型过滤器 Y FILTER

产品型号Product Model: G41H
公称通径Nominal Diameter: 20~500mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: ≤425°C
适用介质Suitable Medium:
水、油、气
water, oil, gas



高低接管篮式过滤阀 DISCRETION OVER BASKET FILTER

产品型号Product Model: SBL
公称通径Nominal Diameter: 25~500mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、酸碱类等
water, oil, acid and alkali class, etc



杠杆式减压阀 LEVER TYPE PRESSURE REDUCING VALVE

产品型号Product Model: Y45H/Y
公称通径Nominal Diameter: 50~400mm
公称压力Nominal Pressure: 6.4~10.0MPa
适用温度Suitable temperature: ≤220°C
适用介质Suitable Medium:
蒸气
steam



先导活塞式气体减压阀 PILOT PISTON GAS PRESSURE REDUCING VALVE

产品型号Product Model: YK43X、YK43F、YK43H
公称通径Nominal Diameter: 15~500mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: 200°C
适用介质Suitable Medium:
空气、氮气、氧气、氢气、液化气、天然气等液体
Air, nitrogen, oxygen, hydrogen, liquefied petroleum
gas, natural gas, gas



拉杆伸缩过滤器 BARS TELESCOPIC FILTER

产品型号Product Model: YSTF
公称通径Nominal Diameter: 50~400mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0~80°C
适用介质Suitable Medium:
水、油等
water, oil, etc



直通篮式过滤器 DIRECT BASKET FILTER

产品型号Product Model: SBL 14
公称通径Nominal Diameter: 25~500mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、酸碱类等
water, oil, acid and alkali class, etc



斯派莎克蒸气减压阀 SEND SALLY G STEAM PRESSURE REDUCING VALVE

产品型号Product Model: YD43H
公称通径Nominal Diameter: 15~150mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
蒸气
steam



高灵敏度蒸汽减压阀 HIGH SENSITIVITY STEAM PRESSURE REDUCING VALVE

产品型号Product Model: YG43H/Y
公称通径Nominal Diameter: 25~80mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: ≤350°C
适用介质Suitable Medium:
蒸气
steam



过滤器 FILTER

产品型号Product Model: U型
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~2.5MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、油、空气、蒸气
water, oil, air, steam



自动反冲洗过滤器 AUTOMATIC REVERSE WASH FILTER

产品型号Product Model: ZPG
公称通径Nominal Diameter: 40~1500mm
公称压力Nominal Pressure: 0.6~5.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水
water



ATIO VALVE TYPE

产品型号Product Model: Y43X
公称通径Nominal Diameter: 40~200mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
water



支管减压阀 PIPE PRESSURE REDUCING VALVE

产品型号Product Model: YZ11X
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水、油、气
water, oil, gas



法兰连接正、反折流式T型过滤器 FLANGE CONNECTION IS, REFLEXED STREAMING T FILTER

产品型号Product Model: ST14/24
公称通径Nominal Diameter: 50~400mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、酸碱类等
water, oil, acid and alkali class, etc



氧气、氮气过滤器 BUCKET TO BE AUTOMATIC REVERSE WASH FILTER

产品型号Product Model: QF
公称通径Nominal Diameter: 40~400mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~220°C
适用介质Suitable Medium:
空气、氧气、氮气
Air, oxygen, nitrogen

电磁阀系列

SOLENOID VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



电动二通阀 ELECTRIC TWO VALVE

产品型号Product Model: ZN(ZL)-PD03
公称口径Nominal Diameter: 15~25mm
公称压力Nominal Pressure: 220±10%V, 50~60HZ
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
冷水、热水
Cold water, hot water



直动式煤气电磁阀 E-STYLE GAS SOLENOID VALVES

产品型号Product Model: ZCM-15
公称口径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 0~4kaf/cm²
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
煤气、甲烷、瓦斯
Gas, methane, gas



法兰式大口径液、气电磁阀 FLANGE LARGE DIAMETER LIQUID, GAS SOLENOID VALVES

产品型号Product Model: DFD-40JF
公称口径Nominal Diameter: 10~50mm
公称压力Nominal Pressure: 常开式: 03~8bar2
常闭式: 03~12bar2
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
液体、水、气体、油 (20CST以下)
Liquid, water, gas, oil (20 CST below))



法兰式大口径液、气电磁阀 FLANGE LARGE DIAMETER LIQUID, GAS SOLENOID VALVES

产品型号Product Model: DF-150CF
公称口径Nominal Diameter: 40~200mm
公称压力Nominal Pressure: 常开式: 03~8bar2
常闭式: 03~12bar2
适用温度Suitable temperature: -29°C~160°C
适用介质Suitable Medium:
液体、水、气体、油 (20CST以下)
Liquid, water, gas, oil (20 CST below))



不锈钢电磁阀 STAINLESS STEEL ELECTROMAGNETIC VALVE

产品型号Product Model: ZCT, ZCQ
公称口径Nominal Diameter: 3~20mm
公称压力Nominal Pressure: 常闭式: 0~10 kgf/cm²
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
蒸气、水、油、弱酸性液体
Steam, water, oil, weak acid alkali liquid



真空电磁阀 VACUUM ELECTROMAGNETIC VALVE

公称口径Nominal Diameter: 10~350mm
公称压力Nominal Pressure: 1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
蒸气、蒸馏水
steam, distilled water



电磁阀 ELECTROMAGNETIC VALVE

产品型号Product Model: ZW
公称口径Nominal Diameter: 25~50mm
公称压力Nominal Pressure: 0~16kgf/cm²
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
空气、水、油
Air, water, oil



电动二通阀 ELECTRIC TWO VALVE

产品型号Product Model: ZN(ZL)-PD02
公称口径Nominal Diameter: 2.5~50mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
冷冻热水
cold/ hot water

波纹管系列

BELLOWS VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



德标波纹管截止阀 GERMAN STANDARD BELLOW GLOBE VALVE

产品型号Product Model: WJ41H/F
公称口径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 10.0~250MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品
water, steam, oil products



德标截止阀 DIN GLOBE VALVE

产品型号Product Model: JW41H
公称口径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品
water, steam, oil products



美标波纹管截止阀 AMERICAN STANDARD BELLOWS GLOBE VALVE

产品型号Product Model: WJ41H
公称口径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 150~300Lb
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品
water, steam, oil products



国标 (A105) 波纹管截止阀 GB(A105) BELLOWS GLOBE VALVE

产品型号Product Model: WJ41H/W
公称口径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品
water, steam, oil products



国标直波式波纹管截止阀 GB STRAIGHT WAVE TYPE BELLOWS GLOBE VALVE

产品型号Product Model: WJ45H/F
公称口径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
天然气、热水
Natural gas, hot water



德标Y型过滤器 GERMAN STANDARD Y FILTER

产品型号Product Model: GY41H
公称口径Nominal Diameter: 15~500mm
公称压力Nominal Pressure: 1.6~40MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
热油、蒸气、热水
Heat oil, steam and hot water



德标止回阀 GERMAN STANDARD CHECK VALVE

产品型号Product Model: H41HY
公称口径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品
water, steam, oil products



大连式波纹管截止阀 DALIAN TYPE BELLOWS GLOBE VALVE

产品型号Product Model: BL8C5Y
公称口径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~16MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品
water, steam, oil products

氧气阀系列

OXYGEN VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



不锈钢氧气截止阀
STAINLESS STEEL OXYGEN GLOBE VALVE

产品型号Product Model: JY41W
公称通径Nominal Diameter: 15~400mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
氧气、氮气、氢气、空气等
Oxygen, nitrogen, hydrogen air, etc



不锈钢氧气球阀
STAINLESS STEEL OXYGEN BALL VALVE

产品型号Product Model: QY347
公称通径Nominal Diameter: 15~400mm
公称压力Nominal Pressure: 2.5~4.0MPa
适用温度Suitable temperature: ≤150°C
适用介质Suitable Medium:
氧气
Oxygen Gas, methane, gas



铜氧气阀
COPPER OXYGEN VALVE VALVE

产品型号Product Model: JY41W
公称通径Nominal Diameter: 15~400mm
公称压力Nominal Pressure: 2.5~4.0MPa
适用温度Suitable temperature: ≤150°C
适用介质Suitable Medium:
氧气
Oxygen



铜氧气球阀
COPPER OXYGEN BALL VALVE

产品型号Product Model: QY47F
公称通径Nominal Diameter: 15~250mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
氧气、氮气、氢气、空气等
Oxygen, nitrogen, hydrogen air, etc



铜氧气阀
COPPER OXYGEN VALVE VALVE

产品型号Product Model: JY541W
公称通径Nominal Diameter: 15~400mm
公称压力Nominal Pressure: 2.5~4.0MPa
适用温度Suitable temperature: -40°C~200°C
适用介质Suitable Medium:
氧气
Oxygen



氧气调节阀
OXYGEN CONTROL VALVE

产品型号Product Model: ZJHM
公称通径Nominal Diameter: 20~200mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
氧气
Oxygen



低温截止阀
LOW TEMPERATURE GLOBE VALVE

产品型号Product Model: DJ61Y
公称通径Nominal Diameter: 10~100mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: ≥196°C
适用介质Suitable Medium:
液氧、液氮
Liquid oxygen, liquid nitrogen



铜氧气止回阀
COPPER OXYGEN CHECK VALVE

产品型号Product Model: HY41FY41W
HY41F, HY41W
公称通径Nominal Diameter: 15~600mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
氧气、氮气、氢气、空气等
Oxygen, nitrogen, hydrogen air, etc

呼吸阀、阻火器系列

THE RESPIRATION VALVE, THE FLAME ARRESTER SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



全天候呼吸阀
ALL-WEATHER BREATHING VALVE

产品型号Product Model: GFQ-2
公称通径Nominal Diameter: 50~250mm
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
油品
oil



全天候防爆阻火呼吸阀
ROUND-THE-CLOCK EXPLOSION-PROOF RESISTANCE
FIRE BREATHING VALVE

产品型号Product Model: ZFQ
公称通径Nominal Diameter: 10~400mm
公称压力Nominal Pressure: 0.6~5.0MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
油品
oil



阻火防爆呼吸阀
THE FIREPROOF EXPLOSION-PROOF THE
RESPIRATION VALVE

产品型号Product Model: HXF
公称通径Nominal Diameter: 50~250mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
油品、气体
Oil, gas



HXXY-RK
HX/XY-RK BREATHING MANHOLES

产品型号Product Model: GYXB
公称通径Nominal Diameter: 750mm
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
油品
oil



全天候阻火呼吸阀
TYPE ALL-WEATHER RESISTANCE
FIRE BREATHING VALVE

产品型号Product Model: QZF
公称通径Nominal Diameter: 50~300mm
公称压力Nominal Pressure: 0.6~6.4MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
油品
oil



天然气阻火器
GAS FLAME ARRESTER

产品型号Product Model: ZFQ
公称通径Nominal Diameter: 15~400mm
公称压力Nominal Pressure: 0.6~5.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
氢气、氧气、氮气、液化气
Hydrogen, oxygen, nitrogen, liquefied gas



乙炔阻火器
ACETYLENE FLAME ARRESTER

产品型号Product Model: FP-XT, FPV-XT
公称通径Nominal Diameter: 15~500mm
公称压力Nominal Pressure: 0.6~6.4MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
油、气、天然气
Oil and gas, gas, natural gas



氧气阻火器
OXYGEN FLAME ARRESTER

产品型号Product Model: FP-XT, FPV-XT
公称通径Nominal Diameter: 15~500mm
公称压力Nominal Pressure: 0.6~6.4MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
气体
Gas

阻火器、视镜系列

THE FIRE RESISTANCE, AS A MIRROR SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

卫生级阀门系列

SANITATION VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



阻燃/防爆管道阻火器 GZW- FLAME RETARDANT/EPLOSION-PROOF PIPEFLAME ARRESTER

产品型号Product Model: GZW-1
公称口径Nominal Diameter: 20~600mm
公称压力Nominal Pressure: 0.6~5.0MPa
适用温度Suitable temperature: -29°C~350°C
适用介质Suitable Medium:
油品、氯气液化
Oil, hydrogen, and oxygen liquefaction



快速排（进）气阀 QUICK EXHAUST (INTO) THE AIR VALVE

产品型号Product Model: P2, QB2
公称口径Nominal Diameter: 50~20mm
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水
Water



快速排气阀 QUICK EXHAUST VALVE

产品型号Product Model: P41X, P42X, QB1
公称口径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 2.5~4.0MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水
Water



复合式排气阀 COMPOSITE EXHAUST VALVE

产品型号Product Model: CARX
公称口径Nominal Diameter: 25~200mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水
Water



不锈钢直通视镜 STAINLESS STEEL THROUGH AS A MIRROR

产品型号Product Model: HGS07¹⁰³₁₀₄
公称口径Nominal Diameter: 20~200mm
公称压力Nominal Pressure: 0.6~2.5MPa4.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品
Water, oil



视盅 DEPENDING ON THE CUP

产品型号Product Model: HGS07
公称口径Nominal Diameter: 15~150mm
公称压力Nominal Pressure: 0.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品
Water, oil



卫生级快装蝶阀 SANITATION FAST LOADING BUTTERFLY VALVE

主体材质Material: SUS304, SUS316L
管道口径Pipe size: DN25-150及1"-6"



卫生级对夹蝶阀 HEALTH LEVEL OF BUTTERFLY VALVES

主体材质Material: SUS304, SUS316L
管道口径Pipe size: DN25-150及1"-6"



卫生级螺纹式蝶阀 SANITATION THREAD TYPE BUTTERFLY VALVE

主体材质Material: SUS304, SUS316L
管道口径Pipe size: DN25-150及1"-6"



卫生级焊接蝶阀 SANITATION WELDING TYPE BUTTERFLY VALVE

主体材质Material: SUS304, SUS316L
管道口径Pipe size: DN25-150及1"-6"



一端法兰/一端螺纹蝶阀 END FLANGE/END THREAD BUTTEFLY VALVE

主体材质Material: SUS304, SUS316L
管道口径Pipe size: DN25-150及1"-6"



卫生级三片式蝶阀 HEALTH LEVEL THREE CHIP BUTTERFLY VALVE

主体材质Material: SUS304, SUS316L
管道口径Pipe size: DN25-150及1"-6"



卫生级三片式蝶阀 HEALTH LEVEL THREE CHIP BUTTERFLY VALVE

主体材质Material: SUS304, SUS316L
管道口径Pipe size: DN25-150及1"-6"



卫生级活接视镜 HEALTH DEPENDS ON THE SURFACE LIVE BY LIGHT

主体材质Material: SUS304, SUS316L
管道口径Pipe size: DN25-150及1"-6"

卫生级阀门系列

SANITATION VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



卫生级快装球阀
SANITATION FAST LOADING
TYPE BALL VALVE

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



卫生级不无滞留液球阀
SANITATION WITHOUT RETENTION
FLUID BALL VALVE

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



卫生级快装弯头
SANITATION FAST LOADING
ELBOW

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



卫生级焊接弯头
SANITATION WELDING
ELBOW

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



卫生级三通螺纹式球阀
SANITATION TEE THREAD TYPE
BALL VALVE

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



卫生级快装四通
SANITATION FAST LOADING
STONE

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



卫生级焊接弯头
SANITATION WELDING
ELBOW

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



卫生级焊接大小头
SANITATION WELDING
SIZE HEAD

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



卫生级快装隔膜阀
SANITATION FAST LOADING
DIAPHRAGM VALVE

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN10-50及3/4"-2"



卫生级快装三通
SANITATION LEVEL THREE
FAST LOADING

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



卫生级快装大小头
SANITATION FAST LOADING
SIZE HEAD

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



卫生级快装皮管接头
SANITATION FAST LOADING
PIGUAN CONNECTOR

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



卫生级焊接三通
SANITATION WELDING
TEE

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



卫生级U型快装三通
SANITATION U FAST LOADING
TEE

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



卫生级活接头
SANITATION LIVE
JOINT

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



IDF卫生级活接头
SANITATION U FAST LOADING
TEE

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

卫生级阀门系列

SANITATION VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

卫生级阀门系列

SANITATION VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



卫生级卡箍快装接头
SANITATION CARD HOOP FAST
LOADING CONNECTOR

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



卫生级不锈钢管道视镜
SANITATION STAINLESS STEEL
PIPE AS A MIRROR

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



不锈钢长半径弯头ELB90LR
STAINLESS STEEL LONG RADIUS
ELB90LR ELBOW

执行标准 Implement Standard:
ASME/ANSI B16.9
GB/T12459 GB/T13401
SH3408-96SH3409-96
产品材质Material: 304、304L、316L、321、347
通径大小Doameter range: 1/2"-48"



不锈钢长半径弯头ELB45LR
STAINLESS STEEL LONG RADIUS
ELB45LR ELBOW

执行标准 Implement Standard:
ASME/ANSI B16.9
GB/T12459 GB/T13401
SH3408-96SH3409-96
产品材质Material: 304、304L、316L、321、347
通径大小Doameter range: 1/2"-48"



卫生级焊接直通视镜
SANITATION WELDING THROUGH
AS A MIRROR

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



卫生级视镜
SANITATION LEVEL AS A MIRROR

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



不锈钢短半径弯头ELB90SR
STAINLESS STEEL SHORT RADIUS
ELB90SR ELBOW

执行标准 Implement Standard:
ASME/ANSI B16.28
GB/T12459 GB/T13401
SH3408-96SH3409-96
产品材质Material: 304、304L、316L、321、347
通径大小Doameter range: 1/2"-48"



不锈钢等径三通TEE
STAINLESS STEEL SUCH
AS TRACK TEE

执行标准 Implement Standard:
ASME/ANSI B16.9
GB/T12459 GB/T13401
SH3408-96SH3409-96
产品材质Material: 304、304L、316L、321、347
通径大小Doameter range: 1/2"-48"



卫生级快装式止回阀
SANITATION FAST LOADING
CHECK VALVE

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



卫生级焊接式止回阀
SANITATION WELDING TYPE
CHECK VALVE

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



不锈钢翻边短
STAINLESS STEEL
FLANGING SHORT

执行标准 Implement Standard:
MSS SP-43 ASME/ANSI B16.9
GB/T12459(短型Sao)(长型Long)
产品材质Material: 304、304L、316L、321、347
通径大小Doameter range: 1/2"-36"



不锈钢长半径弯头ELB90LR
STAINLESS STEEL LONG RADIUS
ELB90LR ELBOW

执行标准 Implement Standard:
ASME/ANSI B16.9
GB/T12459 GB/T13401
SH3408-96SH3409-96
产品材质Material: 304、304L、316L、321、347
通径大小Doameter range: 1/2"-48"



卫生级三段对夹式止回阀
SANITARY GARAD THREE-PIECE
BUTT-CLAMPED CHECK VALVE

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



不锈钢管支架
STAINLESS STEEL PIPE BRACKET

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



不锈钢同心异径管 RED CON
STAINLESS STEEL CONCENTRIC
DIFFERENT-DIAMETER PIPE RED CON

执行标准 Implement Standard:
ASME/ANSI B16.9
GB/T12459 GB/T13401
SH3408-96SH3409-96
产品材质Material: 304、304L、316L、321、347
通径大小Doameter range: 1/2"-48"



不锈钢偏心异径管 RED ECO
STAINLESS STEEL ECCENTRIC
DIFFERENT-DIAMETER PIPERED ECC

执行标准 Implement Standard:
ASME/ANSI B16.9
GB/T12459 GB/T13401
SH3408-96SH3409-96
产品材质Material: 304、304L、316L、321、347
通径大小Doameter range: 1/2"-48"

卫生级阀门系列

SANITATION VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING

卫生级阀门系列

SANITATION VALVE SERIES

双赢合作 品牌永恒
WIN-WIN COOPERATION BRAND EVERLASTING



带颈对焊法兰 WITH NECK BUTT WELD ENDS FLANGES

公称通径Nominal Diameter: 15~1600mm
公称压力Nominal Pressure: 2.0~42.0MPa
产品材质Product material:
304、304L、321、316、316L、碳钢、高温钢
(Needle type valve series)



蝶阀专用法兰 STAINLESS STEEL BUTTERFLY VALVE FLANGE

公称通径Nominal Diameter: 10~2000mm
公称压力Nominal Pressure: 0.25~16.0MPa
产品材质Product material:
304、304L、321、316、316L、碳钢、高温钢、Q235
(Needle type valve series)



涡街流量计 VORTEX FLOW METER

产品型号Product Model: XKLV
公称通径Nominal Diameter: 20~2000mm
适用介质Suitable Medium:
气体、液体、蒸汽
Gas, Liquid and steam



液体涡轮计量器 LIQUID TURBINE FLOW METER

产品型号Product Model: LWGY
公称通径Nominal Diameter: 100~2000mm
公称压力Nominal Pressure: 1.6~25MPa
适用温度Suitable Temperature: -20°C~50°C
适用介质Suitable Medium:
气体、液体、蒸汽
Gas, Liquid and steam



板式平焊法兰 FLAT PLATE WELDING FLANGES

公称通径Nominal Diameter: 10~2000mm
公称压力Nominal Pressure: 0.25~42.0MPa
产品材质Product material:
304、304L、321、316、316L、碳钢、高温钢
(Needle type valve series)



松套平焊法兰(活动法兰) LOOSE SETS OF FLAT WELDING FLANGES(ACTIVITIES FLANGE)

公称通径Nominal Diameter: 10~2000mm
公称压力Nominal Pressure: 1.6~6.4MPa
产品材质Product material:
Q235、16MN、15CRMO、1CR18N9Ti、304、304L
316、316L



翻柱式磁性浮子液位计 TURN PILLAR TYPE MAGNETIC FLOAT LEVEL GAUGE

产品型号Product Model: UHZ-52
公称通径Nominal Diameter: 10~16mm
公称压力Nominal Pressure: ≤4.0MPa
适用温度Suitable Temperature: -20°C~250°C



透明石英管液位计 CLEAR QUARTZ TUBE LEVEL GAUGE

产品型号Product Model: UNS-A-B
公称通径Nominal Diameter: 20~40mm
公称压力Nominal Pressure: 1.6~6.3MPa
适用温度Suitable Temperature: -50°C~520°C



美标带颈对焊法兰 PNEUMATIC GATE VALVES

公称通径Nominal Diameter: 10~2000mm
公称压力Nominal Pressure: 10~2500MPa
产品材质Product material:
304、304L、321、316、316L、碳钢、高温钢
(Needle type valve series)



美标带颈平焊法兰 AMERICAN STANDARD WITH NECK FLAT WELDING FLANGES

公称通径Nominal Diameter: 10~2000mm
公称压力Nominal Pressure: 0.25~42.0MPa
产品材质Product material:
304、304L、321、316、316L



石英管式双色水位表 Quartz tube type double color water table

产品型号Product Model: Sf303、304
公称压力Nominal Pressure: 0.1~42MPa
适用温度Suitable Temperature: -160°C~530°C



玻璃管液位计 LEVEL GAUGE GLASS TUBE

产品型号Product Model: X49W
公称通径Nominal Diameter: 20mm
公称压力Nominal Pressure: 1.6MPa
适用介质Suitable Medium:
Q235-A(碳钢 Carbon steel)
1Cr18Ni9Ti(不锈钢 Stainless steel)
适用温度Suitable Temperature: ≤150°C



法兰盖 FLANGE COVER

公称通径Nominal Diameter: 10~2000mm
公称压力Nominal Pressure: 0.25~42.0MPa
产品材质Product material:
304、304L、321、316、316L、碳钢、高温钢
(Needle type valve series)



松套翻边管法兰(活动法兰) LOOSE SET OF FLANGING FLANGE (ATIVITIES FLANGE)

公称通径Nominal Diameter: 10~2000mm
公称压力Nominal Pressure: 0.25~42.0MPa
产品材质Product material:
304、304L、321、316、316L、碳钢、高温钢
(Needle type valve series)



浮球液位控制器 FLOAT LEVEL CONTROLLER

产品型号Product Model: UQK-2
公称压力Nominal Pressure: ≤1MPa
适用温度Suitable Temperature: ≤180°C



浮球液控制器 FLOAT LIQUID CONTROLLER

产品型号Product Model: BUOK
公称通径Nominal Diameter: 80mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用介质Suitable Medium: ≥0.45g/cm³
适用温度Suitable Temperature: -40°C~180°C